

# Filtration


## Discover

Quality filters „Made in Germany“ since 1911


Filtration · Filtration · Filtration



Filter Circles




Folded Filters



Technical Cuts



Bulk



Extraction Thimbles



Membranes

Contents .....	3
Welcome to MACHEREY-NAGEL! .....	4

## Filter papers

Raw materials and manufacture .....	5
Important technical parameters of filter papers .....	5
Selection of filter papers .....	6
FilterFinder .....	6
Particle retention of MN filter papers .....	7

### **Filter papers for quantitative analysis ..... 8**

Ashless filter papers .....	8
Wet-strengthened filter papers for quantitative analysis .....	9

### **Filter papers for qualitative analysis ..... 10**

Standard filter papers for qualitative analysis .....	10
Wet-strengthened filter papers for qualitative applications .....	11

### **Glass fibre filters/quartz fibre filters ..... 12**

### **Filter papers for technical applications ..... 14**

Smooth and thick filter papers .....	14
Creped filter papers .....	15
Embossed filter papers .....	15

### **Filter papers for special applications ..... 16**

## Extraction thimbles

Extraction thimbles made from cellulose .....	24
Extraction thimbles made from borosilicate glass .....	25

## Membranes

Chemical resistance of filter membranes .....	27
PORAFIL® membrane filters .....	28
CHROMAFIL® MULTI 96 filters .....	31
CHROMAFIL® filtration cartridges .....	31
CHROMAFIL® syringe filters .....	32

## Indicator and test papers

pH indicator papers .....	38
Test papers for qualitative analysis .....	40
QUANTOFIX® test strips for semi-quantitative determinations .....	42
Other test strips for semi-quantitative determinations .....	43

## Indices

Alphabetical list of applications .....	44
List of filter paper grades .....	50

## Welcome to MACHERY-NAGEL!

We are pleased that you are interested in our range of high quality filtration products. In a new design, we present our filter papers, filter membranes and extraction thimbles for a broad range of applications as well as special products made from filter paper.

Our catalogue "Filtration" also includes pH indicator papers, as well as test papers for qualitative and semi-quantitative analysis. This will give you an overview of the extensive range of applications for these products. Perhaps you may find a convenient solution to one of your analytical tasks. For more than 9 decades, since 1911, MACHERY-NAGEL produces high quality filter papers, which represent the roots of the company. Even today, only the best raw materials are used in production, following long-proven recipes. This guarantees our continuous high quality. Since 1996, MN has established a quality management system in accordance with ISO 9001.

We hope that you enjoy our catalogue and that our products will help to make your lab-life easier.

## MACHERY-NAGEL meets your needs

If you have any questions concerning the products in this catalogue, or if you are looking for any further support, please feel free to contact us:

Technical support and customer service:

+49 24 21 969-138  
+49 24 21 969-161  
+49 24 21 969-174  
+49 24 21 969-187

Product Management Filter Papers: +49 24 21 969-166

Please visit our Filtration Pages:


[www.mn-net.com](http://www.mn-net.com)

### Germany



Tel.: +49 24 21 969-0  
Toll-free 0800: 2616 000  
Fax: +49 24 21 969-199 or -198  
E-Mail: [info@mn-net.com](mailto:info@mn-net.com)

### France



Tel. : +33 388 68 22 68  
Fax : +33 388 51 76 88  
E-Mail : [sales-fr@mn-net.com](mailto:sales-fr@mn-net.com)

### Switzerland



Tel.: +41 62 388 55 00  
Fax: +41 62 388 55 05  
E-Mail: [sales-ch@mn-net.com](mailto:sales-ch@mn-net.com)

### USA



Tel.: +1 484 821 0984  
Toll-free: 888 321 6224 (MACH)  
Fax: +1 484 821 1272  
E-Mail: [sales-us@mn-net.com](mailto:sales-us@mn-net.com)



## Filter papers

### Raw materials and manufacture

For production of the high quality MN filter papers we use cotton linters, refined pulp with a high level of  $\alpha$ -cellulose as well as glass fibres. Cotton linters are short-fibred seed hairs from cotton seeds, which cannot be used for textile purposes, but which are highly suitable for the manufacture of soft and absorbent filter papers.

In addition to cotton linters we use mainly pulp, which is obtained by chemical treatment of plant materials, e.g. coniferous or deciduous wood.

At MACHEREY-NAGEL only the most experienced paper specialists select the raw materials in order to ensure the continuously high quality of our filter papers.

For the manufacturing of MN glass fibre filters we use staple fibres made from borosilicate glass (exception: paper from quartz fibres). With a diameter of 0.5–1.5  $\mu\text{m}$  these glass fibres are considerably thinner than cellulose fibres. One of the most important features of glass fibre filters is their resistance to almost all chemicals (exception e.g. hydrogen fluoride).



### Important technical parameters of filter papers

Parameter	Description
Ash content/ residue on ignition	The ash content is determined in accordance with DIN 54370: 10 g filter paper are weighed after ignition in a platinum crucible at 800 °C. Results are expressed as % of original paper weight.
Dry bursting strength	For determination of the dry bursting strength the paper is clamped over a rubber diaphragm with an area of 10 cm <sup>2</sup> . The strain on the paper is then increased by applying an increasing air pressure, until the paper bursts. The dry bursting strength in accordance with DIN 53113 is stated in KPa.
Tensile strength	For determination of the tensile strength a paper strip (measuring 180 x 15 mm) is subjected to vertical strain by applying increasing weight. The force expended at the moment of tearing represents the tensile strength. Results are expressed in N/15 mm.
Thickness	The thickness of a paper is measured with a touch pressure device. Especially for soft and creped papers it is important that the touch pressure is not too high. Otherwise the papers are compressed and a falsely low thickness is obtained.
Filtration speed	For determination of the filtration speed in accordance with DIN 53137 the duration of flow of 10 mL distilled water through a quadrant-folded, freely suspended filter circle of 12.5 cm diameter is measured. Results are expressed in seconds.
Basis weight	The basis weight is determined for a sample of 10 x 10 cm. It is measured in g/m <sup>2</sup> .
Gurley test	The Gurley test measures the time required for filtration of 100 mL air at a water column pressure of 31 mm. The sample has an area of ¼ sq. inch.
Wet strength	The wet strength of a paper is a measure for the mechanical stability of a paper in a wet or moist condition. For example, it can be determined as the tensile strength or the bursting strength (see above).
Pore size	The retention efficiency of a filter paper is influenced by several factors. Since filter papers are deep-bed filters, one usually refers to a mean particle retention.
Capillary rise according to Klemm	The capillary rise according to Klemm indicates how far a strip of filter paper is moistened in 10 min when vertically dipped with one end into distilled water (20 °C).
Particle retention	Particle retention refers to the efficiency of filter papers in retaining certain precipitates. It is characterised by the permeability of the paper for precipitates of iron(III) oxyhydrate, lead sulfate, calcium oxalate and barium sulfate.

## Selection of filter papers

Important filtration properties for certain applications

Application	Recommended filter
filter cake ignition and quantitative determination of the residue (gravimetric analysis)	ashless filter papers
analysis of the filtrate; it is important that no interfering substances are extracted from the filter paper	ashless filter papers or glass fibre filters
mechanical removal of the filter cake from the filter, e.g. with a jet from a wash bottle or with a spatula	wet-strengthened filters, (hardened filter papers)
separation of an organic solvent from water	hydrophobic filters (MN 616 WA, MN 617 WA)
visualisation of small amounts of light precipitates	black filter paper (MN 220)
technical filtration or need for large cuts	technical filter papers or thick filter papers
retention of very fine precipitates	slow filter papers
retention of coarse precipitates and fast filtration	fast filter papers
filtration of strongly acidic or strongly basic liquids	glass fibre filters
filtration of aggressive liquids (e.g. strong oxidants)	glass fibre filters
need for very low metal ion blanks of the filter (e.g. for investigation of air-borne particles)	quartz fibre filters
accelerated filtration with constant retention efficiency	creped paper
filtration at increased pressure or strong mechanical load (e.g. heavy filter cake).	thick technical filter papers
strongly absorbent paper, no special wet strength required	chromatography papers

Please also note the list of applications on page 44.

## FilterFinder

The FilterFinder allows the easy transfer to high quality filters from MACHEREY-NAGEL.

### The easy 1-2-3 procedure:

- 1.) Select the current manufacturer
- 2.) Enter the current reference
- 3.) Start the search

The FilterFinder immediately traces the optimal filter paper from MACHEREY-NAGEL. A link appears that leads to the respective data sheet. This allows a quick and easy cross-check to find out whether the paper meets the requirements. You can be sure to get the optimal paper.


[www.mn-net.com/filterfinder](http://www.mn-net.com/filterfinder)





## Particle retention of MN filter papers

The particle retention capacity is an important parameter for characterising a filter paper. The following diagram shows typical values of our analytical filter papers.

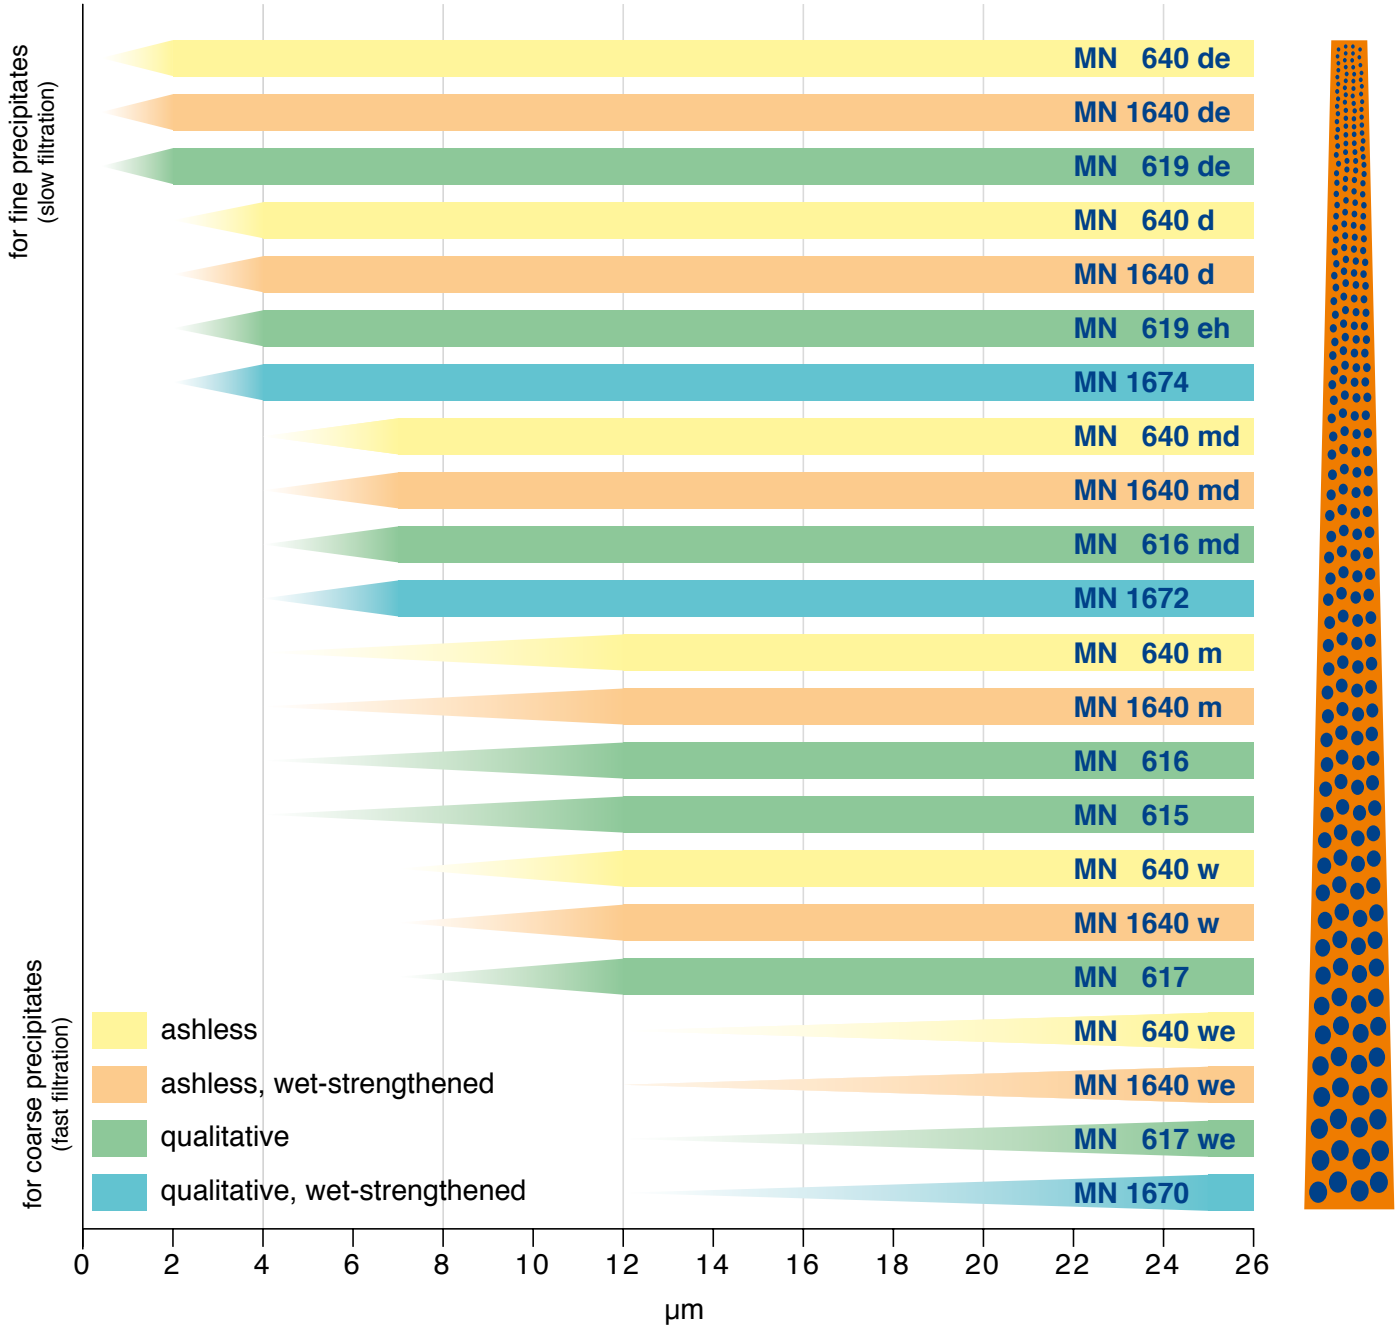

### How to read the graph



## Filter papers for quantitative analysis

### Ashless filter papers

Ashless filter papers are particularly suited for quantitative routine analysis and are manufactured from refined pulp and linters. They are acid-washed and have an extremely low ash content of < 0.01 %. The amount of  $\alpha$ -cellulose is about 95 %.



#### Technical data

Grade	Color code	Properties	Thickness	Filtration speed	Basis weight
MN 640 we		very fast filtration, smooth	0.22 mm	5 s	85 g/m <sup>2</sup>
MN 640 w	≡ No. 41 grey label ≡ black ribbon	fast filtration, smooth	0.2 mm	9 s	85 g/m <sup>2</sup>
MN 640 m	≡ No. 43 white label ≡ white ribbon	medium fast filtration, smooth	0.2 mm	27 s	85 g/m <sup>2</sup>
MN 640 md	≡ No. 40 yellow label ≡ red ribbon	medium to slow filtration, smooth	0.2 mm	55 s	85 g/m <sup>2</sup>
MN 640 dd	≡ No. 44 blue label ≡ green ribbon	slow filtration, smooth	0.16 mm	100 s	70 g/m <sup>2</sup>
MN 640 d	≡ No. 42 green label ≡ blue ribbon	slow filtration, smooth	0.17 mm	140 s	85 g/m <sup>2</sup>
MN 640 de		very slow filtration, smooth	0.2 mm	195 s	100 g/m <sup>2</sup>

#### Ordering information

References for packs of 100 filters

Ø	MN 640 we	MN 640 w	MN 640 m	MN 640 md	MN 640 dd	MN 640 d	MN 640 de
55 mm	20 10 05	20 20 05	20 30 05	20 40 05	20 60 05	20 50 05	20 70 05
70 mm	20 10 07	20 20 07	20 30 07	20 40 07	20 60 07	20 50 07	20 70 07
90 mm	20 10 09	20 20 09	20 30 09	20 40 09	20 60 09	20 50 09	20 70 09
110 mm	20 10 11	20 20 11	20 30 11	20 40 11	20 60 11	20 50 11	20 70 11
125 mm	20 10 12	20 20 12	20 30 12	20 40 12	20 60 12	20 50 12	20 70 12
150 mm	20 10 15	20 20 15	20 30 15	20 40 15	20 60 15	20 50 15	20 70 15
185 mm	20 10 18	20 20 18	20 30 18	20 40 18	20 60 18	20 50 18	20 70 18
240 mm	20 10 24	20 20 24	20 30 24	20 40 24	20 60 24	20 50 24	20 70 24
320 mm	20 10 32	20 20 32	20 30 32	20 40 32	20 60 32	20 50 32	20 70 32

other sizes and cuts on request



## Wet-strengthened filter papers for quantitative analysis

These wet-strengthened hard filter papers are manufactured from refined pulp and linters and have a low ash content of < 0.01 %. They are often used for quantitative routine procedures and for analytical gravimetric applications. Due to their high mechanical strength in wet condition they are particularly suited for applications, where the residue is removed from the filter e.g. with a spatula or a jet of water.



### Technical data

Grade	Properties	Thickness	Filtration speed	Basis weight
MN 1640 we	wet-strengthened, very fast filtration, smooth	0.22 mm	5 s	85 g/m <sup>2</sup>
MN 1640 w	wet-strengthened, fast filtration, smooth	0.2 mm	9 s	85 g/m <sup>2</sup>
MN 1640 m	wet-strengthened, medium fast filtration, smooth	0.2 mm	27 s	85 g/m <sup>2</sup>
MN 1640 md	wet-strengthened, medium to slow filtration, smooth	0.2 mm	55 s	85 g/m <sup>2</sup>
MN 1640 d	wet-strengthened, slow filtration, smooth	0.17 mm	140 s	85 g/m <sup>2</sup>
MN 1640 de	wet-strengthened, very slow filtration, smooth	0.2 mm	195 s	100 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø	MN 1640 we	MN 1640 w	MN 1640 m	MN 1640 md	MN 1640 d	MN 1640 de
55 mm	22 10 05	22 20 05	22 30 05	22 40 05	22 50 05	22 70 05
70 mm	22 10 07	22 20 07	22 30 07	22 40 07	22 50 07	22 70 07
90 mm	22 10 09	22 20 09	22 30 09	22 40 09	22 50 09	22 70 09
110 mm	22 10 11	22 20 11	22 30 11	22 40 11	22 50 11	22 70 11
125 mm	22 10 12	22 20 12	22 30 12	22 40 12	22 50 12	22 70 12
150 mm	22 10 15	22 20 15	22 30 15	22 40 15	22 50 15	22 70 15
185 mm	22 10 18	22 20 18	22 30 18	22 40 18	22 50 18	22 70 18
240 mm	22 10 24	22 20 24	22 30 24	22 40 24	22 50 24	22 70 24
320 mm	22 10 32	22 20 32	22 30 32	22 40 32	22 50 32	22 70 32

other sizes and cuts on request



## Filter papers for qualitative analysis

### Standard filter papers for qualitative analysis

Qualitative filter papers are manufactured from the same raw materials as the ashless grades and are particularly suited for general laboratory filtrations. The average ash content is about 0.1 %, the amount of  $\alpha$ -cellulose is about 95 %.



#### Technical data

Grade	Properties	Thickness	Filtration speed	Basis weight
MN 617 we	extra soft, fast filtration, smooth	0.22 mm	5 s	85 g/m <sup>2</sup>
MN 617 = No. 4	soft, fast filtration, smooth	0.2 mm	9 s	85 g/m <sup>2</sup>
MN 615 = No. 1	medium fast filtration, smooth	0.16 mm	22 s	70 g/m <sup>2</sup>
MN 616	medium fast filtration, smooth	0.2 mm	27 s	85 g/m <sup>2</sup>
MN 618 = No. 3	medium fast filtration, smooth	0.32 mm	22 s	140 g/m <sup>2</sup>
MN 616 md = No. 2	medium to slow filtration, smooth	0.2 mm	55 s	85 g/m <sup>2</sup>
MN 619	dense, slow filtration, smooth	0.17 mm	100 s	75 g/m <sup>2</sup>
MN 619 eh = No. 6	dense, slow filtration, smooth	0.17 mm	140 s	85 g/m <sup>2</sup>
MN 619 de = No. 5	extra dense, very slow filtration, smooth	0.2 mm	195 s	100 g/m <sup>2</sup>

#### Ordering information

References for packs of 100 filters

Ø	MN 617 we		MN 617		MN 615		MN 616		MN 618	
55 mm	43 50 05	53 50 05	43 40 05	53 40 05	43 10 05	53 10 05	43 20 05	53 20 05	43 60 05	53 60 05
70 mm	43 50 07	53 50 07	43 40 07	53 40 07	43 10 07	53 10 07	43 20 07	53 20 07	43 60 07	53 60 07
90 mm	43 50 09	53 50 09	43 40 09	53 40 09	43 10 09	53 10 09	43 20 09	53 20 09	43 60 09	53 60 09
110 mm	43 50 11	53 50 11	43 40 11	53 40 11	43 10 11	53 10 11	43 20 11	53 20 11	43 60 11	53 60 11
125 mm	43 50 12	53 50 12	43 40 12	53 40 12	43 10 12	53 10 12	43 20 12	53 20 12	43 60 12	53 60 12
150 mm	43 50 15	53 50 15	43 40 15	53 40 15	43 10 15	53 10 15	43 20 15	53 20 15	43 60 15	53 60 15
185 mm	43 50 18	53 50 18	43 40 18	53 40 18	43 10 18	53 10 18	43 20 18	53 20 18	43 60 18	53 60 18
240 mm	43 50 24	53 50 24	43 40 24	53 40 24	43 10 24	53 10 24	43 20 24	53 20 24	43 60 24	53 60 24
320 mm	43 50 32	53 50 32	43 40 32	53 40 32	43 10 32	53 10 32	43 20 32	53 20 32	43 60 32	53 60 32

Ø	MN 616 md		MN 619		MN 619 eh		MN 619 de	
55 mm	43 30 05	53 30 05	43 70 05	53 70 05	43 80 05	53 80 05	43 90 05	53 90 05
70 mm	43 30 07	53 30 07	43 70 07	53 70 07	43 80 07	53 80 07	43 90 07	53 90 07
90 mm	43 30 09	53 30 09	43 70 09	53 70 09	43 80 09	53 80 09	43 90 09	53 90 09
110 mm	43 30 11	53 30 11	43 70 11	53 70 11	43 80 11	53 80 11	43 90 11	53 90 11
125 mm	43 30 12	53 30 12	43 70 12	53 70 12	43 80 12	53 80 12	43 90 12	53 90 12
150 mm	43 30 15	53 30 15	43 70 15	53 70 15	43 80 15	53 80 15	43 90 15	53 90 15
185 mm	43 30 18	53 30 18	43 70 18	53 70 18	43 80 18	53 80 18	43 90 18	53 90 18
240 mm	43 30 24	53 30 24	43 70 24	53 70 24	43 80 24	53 80 24	43 90 24	53 90 24
320 mm	43 30 32	53 30 32	43 70 32	53 70 32	43 80 32	53 80 32	43 90 32	53 90 32

other sizes and cuts on request

## Wet-strengthened filter papers for qualitative applications

Wet-strengthened analytical filter papers are manufactured from refined pulp and linters and feature a content of  $\alpha$ -cellulose of more than 95 %. The smooth surface of these papers allows fibre-free filtration. They feature a high wet strength and can also be used in the filtration of strongly alkaline or strongly acidic solutions. Due to their high mechanical strength in wet condition they are particularly suited for applications, where the residue is removed from the filter e.g. with a spatula or a jet of water.









### Technical data

Grade	Properties	Thickness	Filtration speed	Basis weight
MN 1670	wet-strengthened, fast filtration, smooth	0.13 mm	9 s	85 g/m <sup>2</sup>
MN 1672	wet-strengthened, medium fast filtration, smooth	0.13 mm	35 s	85 g/m <sup>2</sup>
MN 1674	wet-strengthened, slow filtration, smooth	0.13 mm	110 s	85 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø	MN 1670		MN 1672		MN 1674	
						
55 mm	47 00 05	57 00 05	47 20 05	57 20 05	47 40 05	57 40 05
70 mm	47 00 07	57 00 07	47 20 07	57 20 07	47 40 07	57 40 07
90 mm	47 00 09	57 00 09	47 20 09	57 20 09	47 40 09	57 40 09
110 mm	47 00 11	57 00 11	47 20 11	57 20 11	47 40 11	57 40 11
125 mm	47 00 12	57 00 12	47 20 12	57 20 12	47 40 12	57 40 12
150 mm	47 00 15	57 00 15	47 20 15	57 20 15	47 40 15	57 40 15
185 mm	47 00 18	57 00 18	47 20 18	57 20 18	47 40 18	57 40 18
240 mm	47 00 24	57 00 24	47 20 24	57 20 24	47 40 24	57 40 24
320 mm	47 00 32	57 00 32	47 20 32	57 20 32	47 40 32	57 40 32

other sizes and cuts on request



## Glass fibre filters/quartz fibre filters

Glass fibre filters allow a fast filtration and simultaneously a very high particle retention. They are manufactured from borosilicate glass fibres and are chemically resistant towards most organic and inorganic solvents (except HF). For the analysis of air-borne particles we recommend the quartz fibre filters MN QF-10 which feature an extremely low content of metal traces.



### Technical data

Grade	Thickness	Basis weight	Filtration speed air	Particle retention	Max. temperature	Binder
MN GF-1 ≡ GF/A	0.3 mm	55 g/m <sup>2</sup>	12 s	0.7 µm	500 °C	without
MN GF-2 ≡ GF/B	0.65 mm	140 g/m <sup>2</sup>	30 s	0.5 µm	500 °C	without
MN GF-3 ≡ GF/C	0.28 mm	50 g/m <sup>2</sup>	25 s	0.6 µm	500 °C	without
MN GF-4 ≡ GF/D	0.60 mm	120 g/m <sup>2</sup>	5 s	1.4 µm	500 °C	without
MN GF-5 ≡ GF/F	0.40 mm	85 g/m <sup>2</sup>	80 s	0.4 µm	500 °C	without
MN GF-6	0.35 mm	70 g/m <sup>2</sup>	12 s	0.6 µm	500 °C	without
MN 85/70	0.35 mm	70 g/m <sup>2</sup>	15 s	0.6 µm	200 °C	organic
MN 85/70 BF	0.35 mm	70 g/m <sup>2</sup>	15 s	0.6 µm	500 °C	without
MN 85/90	0.40 mm	90 g/m <sup>2</sup>	15 s	0.5 µm	200 °C	organic
MN 85/90 BF	0.40 mm	90 g/m <sup>2</sup>	15 s	0.5 µm	500 °C	without
MN 85/220	1.0 mm	220 g/m <sup>2</sup>	15 s	0.4 µm	200 °C	organic
MN 85/220 BF	1.0 mm	220 g/m <sup>2</sup>	15 s	0.4 µm	500 °C	without
MN QF-10 ≡ QM/A		85 g/m <sup>2</sup>	< 5 s		950 °C	without




### Ordering information




References for packs of 100 filters

Ø	MN GF-1	MN GF-2	MN GF-3	MN GF-4	MN GF-5	MN GF-6	MN 85/70
25 mm	41 10 025	41 20 025	41 30 025	41 40 025	41 50 025	41 60 025	40 30 025
37 mm	41 10 037	41 20 037	41 30 037	41 40 037	41 50 037	41 60 037	40 30 037
45 mm	41 10 045	41 20 045	41 30 045	41 40 045	41 50 045	41 60 045	40 30 045
55 mm	41 10 05	41 20 05	41 30 05	41 40 05	41 50 05	41 60 05	40 30 05
70 mm	41 10 07	41 20 07	41 30 07	41 40 07	41 50 07	41 60 07	40 30 07
90 mm	41 10 09	41 20 09	41 30 09	41 40 09	41 50 09	41 60 09	40 30 09
110 mm	41 10 11	41 20 11	41 30 11	41 40 11	41 50 11	41 60 11	40 30 11
125 mm	41 10 12	41 20 12	41 30 12	41 40 12	41 50 12	41 60 12	40 30 12
150 mm	41 10 15	41 20 15	41 30 15	41 40 15	41 50 15	41 60 15	40 30 15
185 mm	41 10 18	41 20 18	41 30 18	41 40 18	41 50 18	41 60 18	40 30 18
240 mm	41 10 24	41 20 24	41 30 24	41 40 24	41 50 24	41 60 24	40 30 24
270 mm	41 10 27	41 20 27	41 30 27	41 40 27	41 50 27	41 60 27	40 30 27

**Ordering information (cont.)**

References for packs of 100 filters

Ø	MN 85/70 BF	MN 85/90	MN 85/90 BF
			
25 mm	40 40 025	40 50 025	40 60 025
37 mm	40 40 037	40 50 037	40 60 037
45 mm	40 40 045	40 50 045	40 60 045
55 mm	40 40 05	40 50 05	40 60 05
70 mm	40 40 07	40 50 07	40 60 07
90 mm	40 40 09	40 50 09	40 60 09
110 mm	40 40 11	40 50 11	40 60 11
125 mm	40 40 12	40 50 12	40 60 12
150 mm	40 40 15	40 50 15	40 60 15
185 mm	40 40 18	40 50 18	40 60 18
240 mm	40 40 24	40 50 24	40 60 24
270 mm	40 40 27	40 50 27	40 60 27

Ø	MN 85/220	MN 85/220 BF	MN QF-10
			
25 mm	40 70 025	40 80 025	–
37 mm	40 70 037	40 80 037	41 70 037
45 mm	40 70 045	40 80 045	41 70 045
55 mm	40 70 05	40 80 05	41 70 05
70 mm	40 70 07	40 80 07	41 70 07
90 mm	40 70 09	40 80 09	41 70 09
110 mm	40 70 11	40 80 11	–
125 mm	40 70 12	40 80 12	41 70 12
150 mm	40 70 15	40 80 15	41 70 15
185 mm	40 70 18	–	–
240 mm	40 70 24	–	–
270 mm	40 70 27	–	–

other sizes and cuts on request



## Filter papers for technical applications


The filter papers listed below are mainly recommended for technical applications such as industrial filtrations. They are available as sheets, filter circles, folded filters (in part), cuts of almost any shape and as rolls. On request, we will be glad to produce other filter papers or filter papers with special properties as to customers demand.

### Smooth and thick filter papers

#### Technical data

Grade	Application and properties	Thickness	Filtration speed	Basis weight
MN 713	medium speed, for general laboratory use	0.15 mm	20 s	70 g/m <sup>2</sup>
MN 615 A	medium speed, for general applications, slightly stronger than MN 615	0.20 mm	20 s	80 g/m <sup>2</sup>
MN 672	medium speed, very high wet-strength, e.g. for sugar industry	0.20 mm	37 s	85 g/m <sup>2</sup>
MN 674	slow, very high wet-strength	0.19 mm	90 s	85 g/m <sup>2</sup>
MN 52 K	polyester paper with very high mechanical strength, also when wet (moist)	–	–	100 g/m <sup>2</sup>
MN 875	medium speed, e.g. for beverage industry	0.26 mm	25 s	120 g/m <sup>2</sup>
MN 918	fast, for filtration of large volumes of liquid	0.34 mm	9 s	120 g/m <sup>2</sup>
MN 625	medium speed, for general applications	0.26 mm	30 s	130 g/m <sup>2</sup>
MN 804	very fast, soft, e.g. beverage industry	0.40 mm	5 s	140 g/m <sup>2</sup>
MN 621	medium speed, wet-strengthened, e.g. for soil analysis	0.27 mm	40 s	130 g/m <sup>2</sup>
MN 728	slow, with about 30 % activated charcoal for decoloring colored liquids, e.g. for electroplating baths	0.40 mm	55 s	170 g/m <sup>2</sup>
MN 818	fast, strongly absorbent, e.g. for collection of blood drops (Guthrie test)	0.45 mm	8 s	180 g/m <sup>2</sup>
MN 960	fast, e.g. for beverage industry	0.45 mm	14 s	180 g/m <sup>2</sup>
MN 180	medium wet-strength, hard, for technical filtrations	0.35 mm	45 s	180 g/m <sup>2</sup>
MN 675	slow, firm, for filtration of large volumes of liquid	0.35 mm	60 s	180 g/m <sup>2</sup>
MN 604	fast, thick, e.g. for beverage industry	0.40 mm	9 s	200 g/m <sup>2</sup>
MN 827	strongly absorbent, soft	0.70 mm	12 s	270 g/m <sup>2</sup>
MN 835	similar to MN 827, but wet-strengthened, e.g. for electroplating baths	0.70 mm	12 s	270 g/m <sup>2</sup>
MN 270	very high wet-strength, hard, for technical filtrations	0.54 mm	50 s	270 g/m <sup>2</sup>
MN 440	soft thick filter paper, e.g. for electroplating baths	1.0 mm	–	400 g/m <sup>2</sup>
MN 520	soft thick filter paper, e.g. for electroplating baths	1.5 mm	–	500 g/m <sup>2</sup>
MN 866	soft thick filter paper, e.g. for electroplating baths	1.7 mm	–	650 g/m <sup>2</sup>

Available sizes and ordering information on request

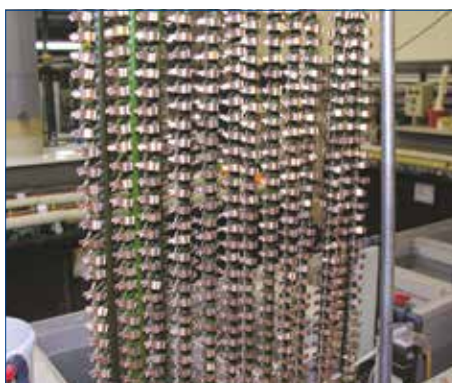



## Creped filter papers

### Technical data

Grade	Application and properties	Thickness	Filtration speed	Basis weight
MN 850	very fast, thin, for fast filtration of small volumes of liquid	0.22 mm	3 s	53 g/m <sup>2</sup>
MN 692	fast, for general applications	0.24 mm	20 s	70 g/m <sup>2</sup>
MN 126/70	medium speed, wet-strengthened, for technical applications	0.20 mm	25 s	70 g/m <sup>2</sup>
MN 751	medium speed for general applications	0.27 mm	12 s	75 g/m <sup>2</sup>
MN 750 N	very fast, very high wet-strength, e.g. for electroplating baths	0.20 mm	5 s	60 g/m <sup>2</sup>
MN 553	medium speed, unbleached (brown paper) for applications requiring high mechanical strength	0.20 mm	30 s	70 g/m <sup>2</sup>
MN 753	medium speed, unbleached (brown paper) for applications requiring high mechanical strength	0.34 mm	15 s	80 g/m <sup>2</sup>
MN 651	fast, for general applications	0.30 mm	9 s	90 g/m <sup>2</sup>
MN 605	very fast, soft, e.g. for filtration of paints and oils	0.35 mm	5 s	100 g/m <sup>2</sup>
MN 651/120	fast, wet-strengthened	0.44 mm	9 s	120 g/m <sup>2</sup>
MN 601	very fast, e.g. for clarification of essential oils	0.60 mm	2 s	140 g/m <sup>2</sup>
MN 652	fast, wet-strengthened	0.45 mm	15 s	140 g/m <sup>2</sup>
MN 606	very fast, e.g. for filtration of transformer oils	0.50 mm	8 s	150 g/m <sup>2</sup>

Available sizes and ordering information on request

## Embossed filter papers

### Technical data

Grade	Application and properties	Thickness	Filtration speed	Basis weight
MN 612	for general applications	0.20 mm	10 s	75 g/m <sup>2</sup>
MN 614	for filtration of essential oils, emulsions, essences etc.	0.25 mm	20 s	75 g/m <sup>2</sup>
MN 620	medium speed, unbleached (brown) e.g. for breweries	0.26 mm	20 s	75 g/m <sup>2</sup>
MN 631	medium speed, unbleached (brown) e.g. for applications in sugar industry	0.20 mm	30 s	80 g/m <sup>2</sup>

Available sizes and ordering information on request





## Filter papers for special applications

Product / application	MN Grade	Page
Activated charcoal filter paper	MN 728	16
Antibiotic resistance testing	MN 827 ATD, MN 827 ATR, MN 827 ATS/8	21
Black filter paper for the detection of light precipitates	MN 220	19
Blotting procedures	MN 218 B, MN 827 B, MN 440 B	23
Filter papers for breweries	MN 614, MN 312, MN 620	18
Chromatography	MN 214, MN 214 ff, MN 218, MN 260, MN 261, MN 827, MN 866	16
Fat analysis	MN 615 ff, MN 715	18
Filtration with suction filters	MN 640 w	20
Filter aids: filter flocs	MN 101, MN 2101	22
Hydrophobic phase separation papers	MN 617 WA, MN 616 WA	19
Ion exchange papers	MN 616 LSA-50, MN 616 LSB-50	21
Kieselguhr paper	MN 660	19
Lens tissue paper (José paper)	MN 13	21
Microscopy, absorbent papers	MN 224	22
Phosphate-free filters	MN 619 G, MN 616 G, MN 617 G	17
Polyester paper	MN 52 K	17
Soil analysis	MN 280 1/4, MN 619 G, MN 616 G, MN 617 G	17
Surface protection paper LAB-TOP, paper coated with PE	MN 210 PE	22
Weighing aids	MN 808, MN 226, MN 40/25, MN 40	20
Guthrie test cards	MN 818 GT	on request
Flue gas testing	MN 1817	on request
Smelling strips for the perfume industry	MN 270 S	on request
Cellulose tablets for X-ray fluorescence analysis	MN 2104 (pack of 500 tablets)	REF 481040
Sample supports, touch papers for Schöniger method	MN 640 mS	REF 486003
Sterilizing paper	MN 68	on request
Electrocardiographs, contact paper		on request
Nitrogen-free paper	MN 321	on request

### Activated charcoal filter paper



The activated charcoal filter paper MN 728 is particularly suited for the clarification and decoloring of solutions. The activated charcoal is incorporated in the paper and cannot be washed out into the filtrate.

#### Technical data

Grade	Thickness	Filtration speed	Basis weight
MN 728	0.4 mm	55 s	170 g/m <sup>2</sup>

#### Ordering information

References for packs of 100 filters

Ø	MN 728	Ø	MN 728
			
55 mm	48 10 05	150 mm	48 10 15
70 mm	48 10 07	185 mm	48 10 18
90 mm	48 10 09	240 mm	48 10 24
110 mm	48 10 11	320 mm	48 10 32
125 mm	48 10 12		

other sizes and cuts on request



## Soil analysis, phosphate-free filters

**MN 280 1/4:** folded filters made from acid-washed paper with a high clarification efficiency for determination of micro-nutrients available to vegetation

**MN 619 G, phosphate-free:** slow filtration, phosphate-free filter paper for soil analysis

**MN 616 G, phosphate-free:** medium fast filtration, phosphate-free filter paper

**MN 617 G, phosphate-free:** fast filtration, phosphate-free filter paper

### Technical data





Grade	Properties	Thickness	Filtration speed	Basis weight
MN 280 1/4	smooth	0.18 mm	95 s	75 g/m <sup>2</sup>
MN 619 G	smooth	0.17 mm	100 s	75 g/m <sup>2</sup>
MN 616 G	smooth	0.20 mm	22 s	85 g/m <sup>2</sup>
MN 617 G	smooth	0.20 mm	9 s	85 g/m <sup>2</sup>



© Sharon Kingston / Fotolia.de

### Ordering information

References for packs of 100 filters

Ø	MN 280 1/4	MN 619 G	MN 616 G	MN 617 G
				
55 mm	–	44 00 05	54 00 05	48 30 05
70 mm	–	44 00 07	54 00 07	48 30 07
90 mm	–	44 00 09	54 00 09	48 30 09
110 mm	52 10 11	44 00 11	54 00 11	48 30 11
125 mm	52 10 12	44 00 12	54 00 12	48 30 12
150 mm	52 10 15	44 00 15	54 00 15	48 30 15
185 mm	52 10 18	44 00 18	54 00 18	48 30 18
240 mm	52 10 24	44 00 24	54 00 24	48 30 24
320 mm	–	44 00 32	54 00 32	48 30 32

other sizes and cuts on request

## Polyester paper

This filters made from 100 % polyester fibres features a very high mechanical strength in dry as well as in wet condition.

### Technical data

Grade	Properties	Thickness	Basis weight
MN 52 K	hydrophobic polyester paper	0.17 mm	100 g/m <sup>2</sup>

Available sizes and ordering information on request



## Filter papers for breweries






The filter paper grade MN 620 can be used to efficiently decarbonate beer. MN 614 and the nitrogen-free MN 321 are used for malt analysis.

### Technical data

Grade	Properties	Thick-ness	Filtration speed	Basis weight
MN 614	medium speed, embossed filter paper	0.25 mm	25 s	75 g/m <sup>2</sup>
MN 321	fast filtration, nitrogen free	0.23 mm	5 s	85 g/m <sup>2</sup>
MN 620	medium speed, embossed filter paper made from unbleached pulp	0.26 mm	25 s	75 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø	MN 614		MN 321	MN 620	
					
55 mm	42 70 05	52 70 05	41 00 05	–	–
70 mm	42 70 07	52 70 07	41 00 07	–	–
90 mm	42 70 09	52 70 09	41 00 09	44 10 09	54 10 09
110 mm	42 70 11	52 70 11	41 00 11	44 10 11	54 10 11
125 mm	42 70 12	52 70 12	41 00 12	44 10 12	54 10 12
150 mm	42 70 15	52 70 15	41 00 15	44 10 15	54 10 15
185 mm	42 70 18	52 70 18	41 00 18	44 10 18	54 10 18
240 mm	42 70 24	52 70 24	41 00 24	44 10 24	54 10 24
320 mm	42 70 32	52 70 32	–	44 10 32	54 10 32

other sizes and cuts on request



## Fat analysis

**MN 615 ff:** This paper is particularly suited for the analysis of fats. A special treatment with organic solvents guarantees that these filters are practically free of fats and resins (ether-soluble residue < 0.1 mg for a 27 cm filter circle).



**MN 715:** This paper is also suited for the analysis of fats. Careful selection of the raw materials ensures a low ether-soluble residue for these filters.

### Technical data

Grade	Properties	Thick-ness	Filtration speed	Basis weight
MN 615 ff	smooth, washed with organic solvents	0.16 mm	22 s	70 g/m <sup>2</sup>
MN 715	smooth	0.16 mm	22 s	70 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø	MN 615 ff	MN 715
		
55 mm	59 10 05	52 80 05
70 mm	59 10 07	52 80 07
90 mm	59 10 09	52 80 09
110 mm	59 10 11	52 80 11
125 mm	59 10 12	52 80 12
150 mm	59 10 15	52 80 15
185 mm	59 10 18	52 80 18
240 mm	59 10 24	52 80 24
270 mm	59 10 27	52 80 27
320 mm	–	56 10 32

other sizes and cuts on request

## Kieselguhr paper MN 660



This filter paper retains very fine turbidities and is e.g. recommended for the clarification of urines or sugar solutions.

### Technical data

Grade	Thickness	Basis weight
MN 660	0.32 mm	140 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø		MN 660	
			
90 mm	44 70 09	–	
110 mm	44 70 11	54 70 11	
125 mm	44 70 12	54 70 12	
150 mm	44 70 15	54 70 15	
185 mm	44 70 18	54 70 18	
240 mm	44 70 24	54 70 24	
320 mm	44 70 32	54 70 32	

other sizes and cuts on request

## Black filter paper for the detection of light precipitates


This filter paper, which is dyed black with a sulfur dye, is used to identify small quantities of light precipitates. For example, it is used for the detection of fluorine or silicon.

### Technical data

Grade	Thickness	Filtration speed	Basis weight
MN 220	0.17 mm	45 s	85 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø		MN 220	
			
55 mm	40 90 05		
70 mm	40 90 07		
90 mm	40 90 09		
110 mm	40 90 11		
125 mm	40 90 12		
150 mm	40 90 15		
185 mm	40 90 18		

other sizes and cuts on request

## Hydrophobic phase separation papers




These papers are made hydrophobic (impermeable to water) by impregnation with a silicone. With the aid of these filters, water can be separated from water-immiscible organic solvents in an elegant manner, by means of a simple filtration.

### Technical data

Grade	Properties	Thickness	Filtration speed	Basis weight
MN 617 WA	smooth	0.2 mm	fast	85 g/m <sup>2</sup>
MN 616 WA	smooth	0.2 mm	medium fast	85 g/m <sup>2</sup>

### Ordering information

References for packs of 100 filters

Ø		MN 617 WA		MN 616 WA	
					
55 mm	–	48 40 05	–		
70 mm	–	48 40 07	–		
90 mm	43 00 09	48 40 09	58 40 09		
110 mm	43 00 11	48 40 11	58 40 11		
125 mm	43 00 12	48 40 12	58 40 12		
150 mm	43 00 15	48 40 15	58 40 15		
185 mm	43 00 18	48 40 18	58 40 18		
240 mm	43 00 24	48 40 24	52 80 24		
320 mm	–	48 40 32	52 80 32		

other sizes and cuts on request



## Weighing aids


**Weighing boats MN 808:** Weighing boats MN 808 are made from a special, nitrogen-free parchment. They are used to weigh viscous or syrupy substances.

**Weighing paper MN 226:** This is a transparent paper, smooth on both sides, which can be used as substitute for weighing boats. The smooth surface of the paper guarantees that the weighed goods can be transferred without loss.

**Parchment sheets MN 40/25:** These easily crushable (not wet-strengthened) parchment papers are mainly used in the sugar industry for weighing syrupy and semi-crystalline substances.

### Technical data

Grade	Properties	Basis weight
MN 808	weighing boats	n.a.
MN 226	transparent, smooth	40 g/m <sup>2</sup>
MN 40/25	crushable parchment paper	25 g/m <sup>2</sup>

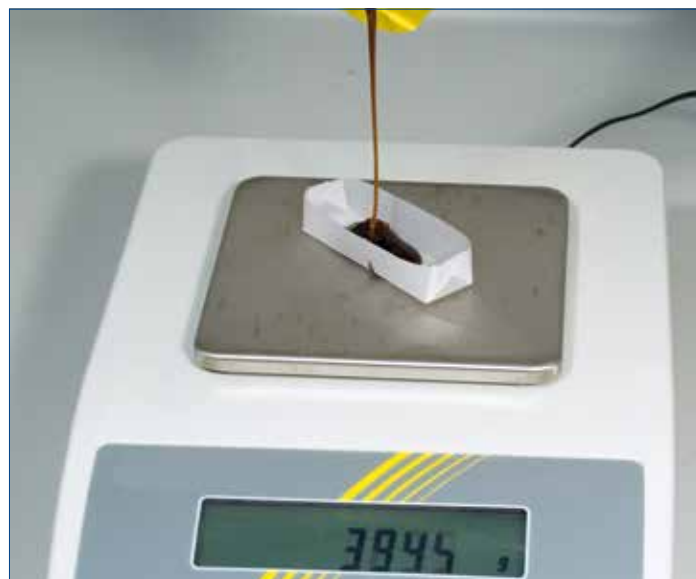

### Ordering information

MN 808		
Size	Pack of	REF
58 x 10 x 10 mm	100 boats	48 60 00
70 x 23 x 15 mm	100 boats	48 60 01

MN 226		
Size	Pack of	REF
block with 100 sheets 9 x 11.5 cm	1 block	18 60 02

MN 40/25		
Size	Pack of	REF
10 x 10 cm	100 sheets	19 40 00

## Filtration with suction filters

These filters are used specifically with suction filters. The elevated border safely prevents sample to run past the edge of the filter. Residues won't stick to the suction filter walls. Thus, the entire filter cake can be used for further analysis quickly and easily.

### Technical data

Grade	Thickness	Filtration speed	Basis weight
MN 640 w	0.2 mm	9 s	85 g/m <sup>2</sup>

### Ordering information

MN 640 w		
Ø	Pack of	REF
90 mm	100	20 29 01
110 mm	100	20 29 03
125 mm	100	20 29 02





## Antibiotic resistance testing


These products are used in testing the resistance of pathogens to antibiotics. For this test the filter paper sections can be impregnated with the antibiotic to be tested and placed on the inoculated nutrient medium. Depending on the effectiveness, a smaller or larger zone of inhibition is formed. MACHEREY-NAGEL only supplies non-impregnated filter paper sections!

### Technical data

Grade	Thickness	Filtration speed	Basis weight
MN 827	0.7 mm	12 s	270 g/m <sup>2</sup>

### Ordering information

MN 827			
Antibiotic test section	Pack of	REF	
Test disks MN 827 ATD, Ø 6 mm	1000	48 40 00	
Test disks MN 827 ATD, Ø 9 mm	1000	48 40 01	
Test stars MN 827 ATS/8	1000	48 40 03	

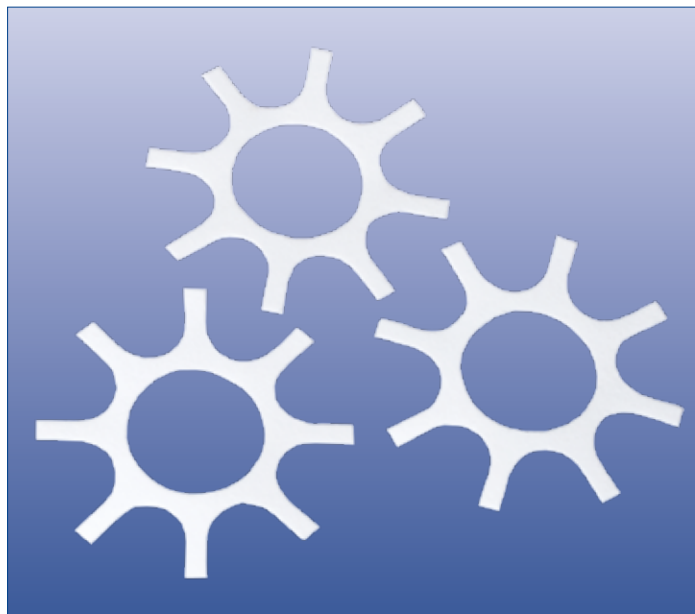

## Ion exchange papers

**MN 616 LSA-50:** Filter paper with strongly acidic cation exchange resin; matrix polystyrene crosslinked with 8.5% DVB; active groups SO<sub>3</sub>H, strongly acidic, supplied in H<sup>+</sup> form; capacity 2.0 mval/g, applicable up to 100 °C.

A folded filter of 15 cm diameter is sufficient to demineralize 100 mL of water with a hardness of 10° d.

**MN 616 LSB-50:** Filter paper with strongly basic anion exchange resin; matrix polystyrene crosslinked with 6% DBV; active groups quaternary ammonium compounds, strongly basic; supplied in OH<sup>-</sup> form; capacity 1.3 mval/g, applicable up to 70 °C.

### Technical data

Grade	Properties	Basis weight
MN 616 LSA-50	contains cationic exchange resin	100 g/m <sup>2</sup>
MN 616 LSB-50	contains anionic exchange resin	100 g/m <sup>2</sup>

### Ordering information

Ø	MN 616 LSA-50	MN 616 LSB-50
48 mm	43 21 10	43 21 20

other sizes and cuts on request

## Lens tissue paper (José paper)

Thin, soft, non-fluffing tissue paper for cleaning optical glasses, cuvettes, also suitable as protective paper for metallographic sections

### Technical data

Grade	Properties	Basis weight
MN 13	very thin, smooth	13 g/m <sup>2</sup>

### Ordering information

MN 13			
Presentation	Pack of	REF	
Sheets, 12 x 12 cm	500 sheets	41 81 01	
Sheets, 36 x 48 cm	500 sheets	41 81 02	
Blocks with 50 sheets 8 x 10 cm	1 block	11 80 00	

other sizes and cuts on request





## Surface protection paper LAB-TOP

Filter paper coated on one side with polyethylene, e.g. for covering laboratory workbenches. The filter paper absorbs spilt liquids. It is especially suited for isotope and bacteriological laboratories as well as for chemical storerooms and cupboards.

### Technical data

Grade	Properties	Thickness	Basis weight
MN 210 PE	one side PE-coated	0.22 mm	140 g/m <sup>2</sup>

### Ordering information

MN 210 PE			
Presentation		Pack of	REF
Sheets, 48 x 60 cm		100 sheets	11 20 00
Sheets, 48 x 60 cm		50 sheets	11 20 00.1
Roll, 100 x 0.48 m		1 roll	11 20 10
Roll, 50 x 0.48 m		1 roll	11 20 50
Roll, 100 x 0.60 m		1 roll	11 20 20
Roll, 50 x 0.60 m		1 roll	11 20 30

other sizes and cuts on request



## Filter aids

### Filter flocs

Filter aids transform difficult precipitates and colloidal particles into a form which can be filtered more easily. When slimy and strongly lyophilic, swelling precipitates are involved, the fibres of the filter flocs prevent formation of a continuous, impermeable layer on the filter. The resulting filter cake remains porous and permeable, and clogging of the filter is prevented.

### Technical data

Grade	Properties
MN 101	qualitative filter flocs
MN 2101	ashless, quantitative filter flocs

### Ordering information

MN 101		MN 2101	
500 g	1000 g	500 g	1000 g
48 11 00	48 11 10	28 11 20	28 11 30



## Microscopy

Paper with good absorbent properties for absorbing liquids from microscopic preparations.

### Technical data

Grade	Properties	Thick-ness	Migration distance	Basis weight
MN 224	for absorbing liquids	0.2 mm	125 mm/30 min	90 g/m <sup>2</sup>

### Ordering information

MN 224		
Presentation	Pack of	REF
blocks of 50 sheets 3.7 x 10 cm	100 blocks	18 50 00

## Blotting procedures and chromatography

### Blotting papers

The smooth surface of these papers ensures a uniform, high absorptivity. They are particularly recommended for blotting procedures.

### Chromatography papers

Paper chromatography requires high quality papers, since they have a considerable impact on the results of a separation.

The chromatography papers listed below are almost exclusively produced from pure linters without addition of other substances. For this reason they show a low wet strength.



### Technical data

Grade	Migration distance	Thickness	Basis weight	Application
MN 218 B	55– 65 mm/10 min	0.36 mm	180 g/m <sup>2</sup>	blotting
MN 827 B	130–140 mm/10 min	0.7 mm	270 g/m <sup>2</sup>	blotting
MN 440 B	130–145 mm/10 min	1.0 mm	400 g/m <sup>2</sup>	blotting
MN 214	90–100 mm/30 min	0.28 mm	140 g/m <sup>2</sup>	chromatography
MN 214 ff <sup>1)</sup>	90–100 mm/30 min	0.28 mm	140 g/m <sup>2</sup>	chromatography
MN 218	90–100 mm/30 min	0.36 mm	180 g/m <sup>2</sup>	chromatography
MN 260	120–130 mm/30 min	0.20 mm	90 g/m <sup>2</sup>	chromatography
MN 261	90–100 mm/30 min	0.18 mm	90 g/m <sup>2</sup>	chromatography
MN 827	130–140 mm/10 min	0.70 mm	270 g/m <sup>2</sup>	chromatography
MN 866	100–120 mm/10 min	1.7 mm	650 g/m <sup>2</sup>	chromatography

<sup>1)</sup> MN 214 defatted

### Ordering information

References for packs of 100 sheets

MN 218 B		MN 827 B		MN 214		MN 214 ff	
Size		Size		Size		Size	
58 x 60 cm	74 21 11	58 x 60 cm	74 21 18	58 x 60 cm	81 70 01	58 x 60 cm	81 70 08
30 x 60 cm	74 21 12	20 x 20 cm	74 21 20				
57 x 46 cm	74 21 13	16 x 16 cm	74 21 28				
20 x 20 cm	74 21 15						
15 x 20 cm	74 21 38						
21 x 9 cm	74 21 31						
13 x 10 cm	74 21 16						
10 x 7 cm	74 21 39						
9.3 x 8 cm	74 21 37						
		MN 440 B				MN 260	
		58 x 60 cm	74 21 25	58 x 60 cm	81 70 03	58 x 60 cm	81 70 04
				MN 261			
				58 x 60 cm	81 70 05	MN 827	
						80 x 80 cm	81 70 07
						38 x 38 cm	81 70 06

other sizes and cuts on request


## Extraction thimbles

Extraction thimbles are often used for holding solid materials, from which certain substances are to be eluted (extracted) with a suitable solvent. Additionally, extraction thimbles are used in the fields of air and waste gas analysis for collecting solid particles (dust).

### Extraction thimbles made from cellulose

#### Technical data

Grade	Properties
MN 645	standard grade, extraction thimbles made from pure cellulose
MN 645 D	extraction thimbles MN 645 with lid to prevent loss of contents
MN 645 F	extraction thimbles made from cellulose, denser than MN 645
MN 645 W	extraction thimbles made from cellulose, more permeable than MN 645
MN 645 R	extraction thimbles MN 645 with sealing collar and two finger recesses on opposite sides of the collar, for dust analysis in industrial gases, exhaust gases and room air

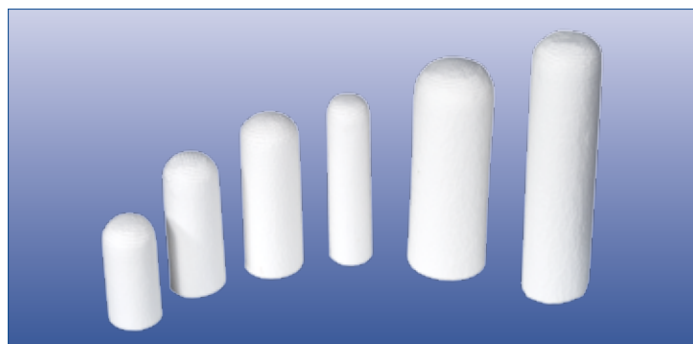

#### Ordering information

References for packs of 25 thimbles

MN 645		
ID x height	wall thickness	REF
8 x 40 mm	1.0 mm	64 50 01
9 x 50 mm	1.0 mm	64 50 02
15 x 50 mm	1.0 mm	64 50 03
15 x 100 mm	1.0 mm	64 50 04
20 x 80 mm	1.5 mm	64 50 05
22 x 80 mm*	1.5 mm	64 50 06
23 x 90 mm	1.5 mm	64 50 07
23 x 100 mm	1.5 mm	64 50 08
27 x 60 mm	1.5 mm	64 50 11
27 x 80 mm	1.5 mm	64 50 09
27 x 100 mm	1.5 mm	64 50 10
28 x 80 mm	1.5 mm	64 50 15
28 x 90 mm	1.5 mm	64 50 16
28 x 100 mm	1.5 mm	64 50 13
28 x 120 mm	1.5 mm	64 50 14
29 x 100 mm	1.5 mm	64 50 17
30 x 60 mm	1.5 mm	64 50 19
30 x 80 mm	1.5 mm	64 50 20
30 x 90 mm	1.5 mm	64 50 21
30 x 100 mm	1.5 mm	64 50 23
30 x 150 mm	1.5 mm	64 50 18

MN 645		
ID x height	wall thickness	REF
31 x 118 mm	1.5 mm	64 50 24
31 x 130 mm	1.5 mm	64 50 25
33 x 80 mm	1.5 mm	64 59 51
33 x 94 mm*	1.5 mm	64 50 22
33 x 205 mm*	1.5 mm	64 50 26
34 x 120 mm	1.5 mm	64 50 27
34 x 150 mm	1.5 mm	64 50 28
38 x 200 mm	1.5 mm	64 50 29
40 x 123 mm	2.0 mm	64 50 31
40 x 150 mm	2.0 mm	64 50 30
43 x 130 mm	2.0 mm	64 50 32
48 x 145 mm	2.0 mm	64 50 33
48 x 200 mm	2.0 mm	64 50 34
48 x 230 mm*	2.0 mm	64 50 35
51 x 145 mm	2.0 mm	64 50 36
51 x 180 mm	2.0 mm	64 50 37
55 x 275 mm	2.0 mm	64 50 40
57 x 315 mm*	2.0 mm	64 50 38
60 x 180 mm	2.0 mm	64 50 39
68 x 250 mm	2.0 mm	64 50 42
70 x 330 mm	2.0 mm	64 50 43

MN 645 D		
ID x height	wall thickness	REF
30 x 80 mm	1.5 mm	64 52 20
30 x 100 mm	1.5 mm	64 52 23
31 x 130 mm	1.5 mm	64 52 25

MN 645 F		
ID x height	wall thickness	REF
22 x 80 mm	1.5 mm	64 54 06
30 x 100 mm	1.5 mm	64 54 23

MN 645 W		
ID x height	wall thickness	REF
20 x 80 mm	1.5 mm	64 51 05
28 x 90 mm	1.5 mm	64 51 16
31 x 205 mm	1.5 mm	64 51 26

MN 645 R		
ID x height	wall thickness	REF
79 x 155 mm	102 mm	64 55 00

\* Extraction thimbles in accordance with DIN 12449 for extractors with defined nominal volumes according to DIN 12602 and 12604

## Extraction thimbles made from borosilicate glass

### Technical data

Grade	Properties
MN 649	extraction thimbles made from glass microfibres without binder, short-term temperature resistance up to 500 °C, very high particle retention, for dust analysis in hot exhaust gases
MN 649 R	extraction thimbles MN 649 with sealing collar and two finger recesses on opposite sides of the collar, for dust analysis in industrial gases, exhaust gases and room air

### Ordering information

References for packs of 25 thimbles

MN 649		
ID x height	wall thickness	REF
15 x 50 mm	1.0 mm	64 91 03
16 x 100 mm	1.0 mm	64 91 04
22 x 80 mm*	1.5 mm	64 91 06
23 x 90 mm	1.5 mm	64 91 07
23 x 100 mm	1.5 mm	64 91 08
28 x 60 mm	1.5 mm	64 91 11
27 x 80 mm	1.5 mm	64 91 09
28 x 120 mm	1.5 mm	64 91 14
30 x 150 mm	1.5 mm	64 91 18
33 x 80 mm	1.5 mm	64 91 20
33 x 90 mm	1.5 mm	64 91 21
33 x 94 mm*	1.5 mm	64 91 22
33 x 100 mm	1.5 mm	64 91 23
33 x 118 mm	1.5 mm	64 91 24
33 x 205 mm*	1.5 mm	64 91 26
35 x 150 mm	1.5 mm	64 91 28
43 x 123 mm	2.0 mm	64 91 31
48 x 230 mm*	2.0 mm	64 91 35
57 x 315 mm*	2.0 mm	64 91 38
75 x 330 mm	2.0 mm	64 91 43

MN 649 R		
ID x height	collar Ø	REF
79 x 155 mm	102 mm	64 95 00
27 x 55 mm	50 mm	64 95 01

\* Extraction thimbles in accordance with DIN 12449 for extractors with defined nominal volumes according to DIN 12602 and 12604



## Membranes

Membranes enable a very convenient, fast and economical separation. Often they are also used as a neutral sample support for further analysis.

### Overview of available membrane filters

Material and properties	Type	Pore sizes [µm]	Page
<b>Cellulose acetate</b> • Suitable for aqueous and many alcoholic media • Low protein binding capacity • Thermally stable up to 180 °C	PORA FIL® CA	0.2 · 0.45 · 0.8 · 1.2	29
<b>Cellulose mixed esters</b> • Suitable for aqueous solutions • Also available sterile and/or with grid • Recommended for gravimetric analysis • Autoclaving possible at 121 °C • Economical	CHROMA FIL® CA PORA FIL® CM	0.2 · 0.45 0.2 · 0.45	35 28
<b>Cellulose mixed esters, fabric-reinforced</b> • Suitable for aqueous solutions • Higher mechanical stability than PORA FIL® CM	CHROMA FIL® MV PORA FIL® MV	0.2 · 0.45 0.2 · 0.45 · 0.8	36 29
<b>Cellulose nitrate</b> • Thermally stable up to 125 °C • Autoclaving possible at 121 °C	PORA FIL® NC	0.2 · 0.45	29
<b>Glass fibre</b> • Inert filter • For highly contaminated samples • Optional pre filter	CHROMA FIL® GF	1.0	36
<b>Polyamide</b> • For aqueous and organic solvents • Thermally stable up to 135 °C	CHROMA FIL® PA	0.2 · 0.45	37
<b>Polycarbonate</b> • Very low halogen blank values • Suitable for quantitative AOX determination • Thermally stable up to 140 °C	PORA FIL® PC	0.4	30
<b>Polyester</b> • Chemically very resistant membrane (not as stable as PTFE) • Suitable for TOC/DOC determination • Thermally stable up to 150 °C	PORA FIL® PE CHROMA FIL® PET CHROMA FIL® GF/PET	0.2 · 0.4 · 1.0 · 5.0 0.2 · 0.45 · 1.20 1.0/0.2 · 1.0/0.45	30 34 33
<b>Polyethersulfon</b> • For aqueous and slightly organic solvents • Suitable for organic acids	CHROMA FIL® PES	0.2 · 0.45 · 5.00	36
<b>Polytetrafluoroethylene (PTFE)</b> • Hydrophobic membrane • Suitable for almost all solvents, chemical resistance towards acids and bases • For filtration of aggressive media • Thermally stable up to 145 °C	PORA FIL® TE CHROMA FIL® PTFE	0.2 · 0.45 · 1.0 · 3.0 0.2 · 0.45	30 35
<b>Polyvinylidene difluoride</b> • Hydrophobic membrane • Suitable for filtration of polar and nonpolar solutions • Chemically inert towards many solvents, similar stability to PTFE	CHROMA FIL® PVDF CHROMA FIL® GF/PVDF	0.2 · 0.45 1.0/0.45	37 33
<b>Regenerated cellulose</b> • Suitable for all media except strong acids and bases • Thermally stable up to 180 °C	PORA FIL® RC CHROMA FIL® RC CHROMA FIL® GF/RC	0.2 · 0.45 0.2 · 0.45 1.0/0.2 · 1.0/0.45	30 34 33

## Chemical resistance of filter membranes

Substances	CA	CM/MV	NC	PC	PE/PET	TE/PTFE	RC	PA	PES	PVDF	GF
<b>Hydrocarbons</b>											
Aliphatic hydrocarbons	+	+	+	+	+	+	+	+	+	+	-
Petroleum ether	+	+	+	+	+	+	+	+	+	+	-
Cyclohexane	+	+	-	-	+	+	+	+	+	+	-
Aromatic hydrocarbons	+	+	+	+	+	+	+	+	+	+	-
Benzene	+	+	+	+	+	+	+	+	-	+	+
Chloroform	-	+	+	-	+	+	+	+	-	+	-
Methylene chloride	-	+	-	-	+	+	+	+	-	+	-
Trichloroethylene	+	+	+	-	+	+	+	+	-	+	+
Tetrachloromethane	+	+	+	+	+	+	+	+	-	+	+
Chlorobenzene, freon	+	+	+	+	+	+	+	-	-	-	-
Gasoline	+	+	+	+	+	+	+	+	+	+	-
Acetonitrile	-	-	-	-	+	+	+	+	+	+	+
<b>Alcohols</b>											
Methanol, 98 %	+	-	-	-	+	+	+	+	+	+	-
Butanol	+	+	+	+	+	+	+	+	+	+	+
Ethanol, 98 %	+	-	+	+	+	+	+	+	+	+	+
Ethanol, 70 %	+	+	+	+	+	+	+	+	+	+	+
Isopropanol	+	+	+	+	+	+	+	+	+	+	-
<i>n</i> -Propanol	+	+	+	+	+	+	+	+	+	+	+
Amyl alcohol	+	+	+	+	+	+	+	-	+	-	-
Benzyl alcohol	+	+	+	+	+	+	+	-	+	-	-
Ethylene glycol	+	+	+	+	+	+	+	+	+	+	+
Glycerine	+	+	+	+	+	+	+	-	+	-	-
Cyclohexanol	-	-	+	-	+	+	+	-	+	-	-
Polyethylene glycol 400	+	+	+	+	+	+	+	-	+	-	-
<b>Aldehydes, ketones</b>											
Acetaldehyde	-	-	-	-	+	+	+	+	-	+	+
Acetone	-	-	-	-	+	+	+	+	-	+	+
Cyclohexanone	-	-	-	-	+	+	+	-	-	-	-
Methyl ethyl ketone	+	-	-	-	+	+	+	-	-	-	-
Methyl isobutyl ketone	+	+	-	-	+	+	+	-	-	-	-
<b>Esters</b>											
Methyl acetate	-	-	-	-	+	+	+	-	+	-	-
Ethyl acetate	-	-	-	-	+	+	+	+	+	+	+
Amyl, propyl, butyl acetate	+	-	-	-	+	+	+	-	+	-	-
Methyl glycol acetate	+	-	+	+	+	+	+	-	+	-	-
Benzyl benzoate	+	+	+	-	+	+	+	-	+	-	-
<i>i</i> -Propyl myristate	+	+	+	+	+	+	-	-	-	-	-
Tricresyl phosphate	+	+	+	+	+	+	-	-	-	-	-
<b>Ethers and sulfoxides</b>											
Diethyl ether	+	+	-	+	+	+	+	+	+	+	+
Dioxan	-	-	-	-	+	+	+	+	-	+	+
Tetrahydrofuran	-	-	-	-	+	+	+	+	-	+	+
Dimethylsulfoxide	-	-	-	-	+	+	+	-	-	-	-

Substances	CA	CM/MV	NC	PC	PE/PET	TE/PTFE	RC	PA	PES	PVDF	GF
<b>Solvents containing nitrogen</b>											
Dimethylformamide	-	-	-	-	+	+	+	+	-	+	+
Dimethylacetamide	-	-	-	+	+	+	+	-	-	-	-
Triethanolamine	+	+	+	+	+	+	+	-	-	-	-
Aniline	-	+	+	-	+	+	+	-	-	-	-
Pyridine	-	-	-	-	+	+	+	-	-	-	-
<b>Acids</b>											
Hydrochloric acid 30 %	-	-	-	-	+	+	-	-	-	+	+
Hydrochloric acid 25 %	-	-	+	-	+	+	+	-	-	-	+
Nitric acid 65 %	-	-	-	+	-	+	-	-	-	+	+
Nitric acid 1 mol/L	+	+	+	-	+	+	+	-	-	-	+
Sulfuric acid 96 %	-	-	-	-	+	+	+	-	-	-	-
Phosphoric acid 80 %	-	-	-	-	+	+	+	-	-	+	+
Phosphoric acid 25 %	+	+	+	+	+	+	+	-	-	-	+
Formic acid 100 %	-	+	-	+	+	+	+	-	+	+	+
Formic acid 25 %	+	-	+	+	+	+	+	-	+	-	+
Acetic acid 96 %	-	-	-	+	+	+	+	-	+	+	+
Acetic acid 25 %	+	+	-	+	+	+	+	-	+	-	+
Oxalic acid 10 % aq.	-	+	-	-	+	+	+	-	+	+	-
Trichloroacetic acid 10 %	+	-	+	+	+	+	-	-	-	-	-
<b>Bases</b>											
Ammonia 25 %	+	-	+	-	-	+	-	-	+	+	+
Ammonia 1 mol/L	+	+	+	-	+	+	+	-	+	-	-
Sodium hydroxide 1 mol/L	-	-	-	-	+	+	+	-	+	-	-
Potassium hydroxide 1 mol/L	-	-	-	-	+	+	+	-	+	-	-
<b>Miscellaneous</b>											
Aqueous phenol solution	-	+	-	-	+	+	+	-	-	-	-
Formalin 30 %	+	+	+	+	+	+	-	-	-	-	-
Turpentine oil	+	+	+	+	+	+	+	-	-	-	-
Castor oil	+	+	+	+	+	+	+	-	-	-	-
Cremophor 2 %	+	+	+	+	+	+	+	-	-	-	-
Hydrogen peroxide 30 %	+	+	+	+	+	+	+	-	-	-	-
Photoresist	-	-	+	+	+	+	+	-	-	-	-
Nail varnish remover	-	-	+	+	+	+	+	-	-	-	-

+ : resistant    + : partly resistant    - : not resistant  
 - : no information



## PORAFIL® membrane filters

### Cellulose mixed ester membranes · PORAFIL® CM

Membranes of cellulose mixed esters are ideal for gravimetric analysis. They are particularly suited for aqueous solutions. The hydrophilic membrane is thermally stable to 125 °C and can be autoclaved at 121 °C. This membrane is often used for contamination tests.



#### Ordering information

##### PORAFIL® CM sterile/not sterile

Ø	Color	Sterile	Grid	Pack of	REF
<b>Pore size 0.45 µm</b>					
47 mm	white	✓	black	100	653 000 45 047
50 mm	white	✓	black	100	653 000 45 050
50 mm	black	✓	white	100	653 100 45 050
50 mm	green	✓	black	100	653 200 45 050
47 mm	white	–	black	100	656 000 45 047
47 mm	black	–	white	100	656 100 45 047
47 mm	green	–	black	100	656 200 45 047
50 mm	white	–	black	100	656 000 45 050
50 mm	black	–	white	100	656 100 45 050
50 mm	green	–	black	100	656 200 45 050

##### PORAFIL® CM white, not sterile, no grid

Ø	Pack of	REF
<b>Pore size 0.20 µm</b>		
13 mm	100	651 000 20 013
47 mm	100	651 000 20 047
50 mm	100	651 000 20 050
142 mm	25	651 000 20 142
<b>Pore size 0.45 µm</b>		
13 mm	100	651 000 45 013
25 mm	100	651 000 45 025
47 mm	100	651 000 45 047
50 mm	100	651 000 45 050
100 mm	25	651 000 45 100
142 mm	25	651 000 45 142
220 mm	25	651 000 45 220

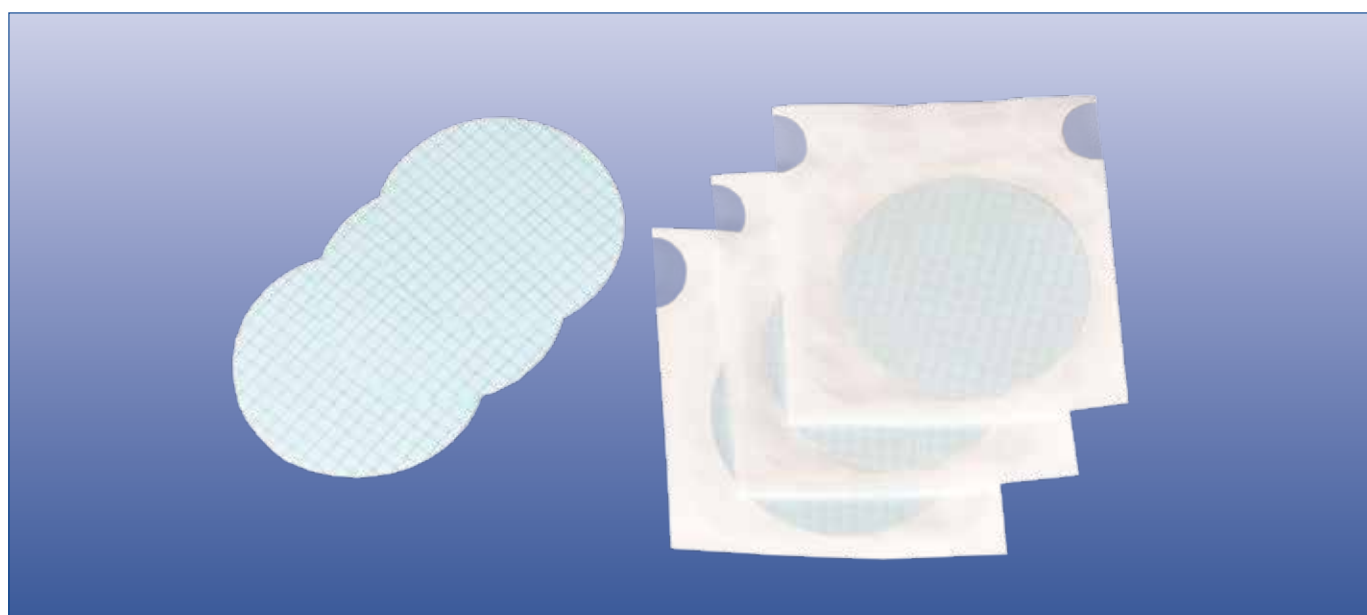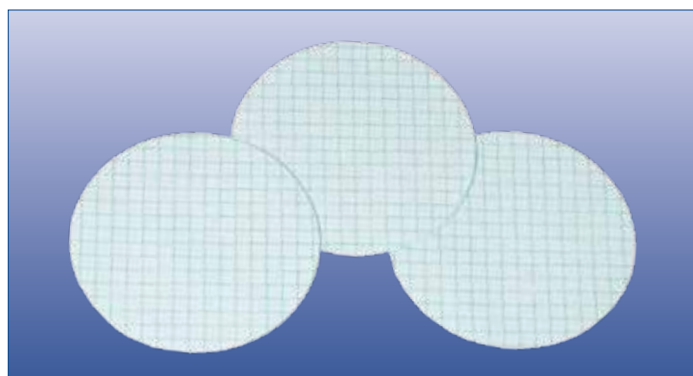

## Cellulose mixed ester membranes, fabric-reinforced · PORAFILE® MV

These cellulose mixed ester membranes are reinforced with a polyester fabric. Their filtration properties are very similar to membranes PORAFILE® CM, however, they are mechanically much more stable.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.45 µm	Pore size 0.8 µm
13 mm	50	650 000 20 013	650 000 45 013	650 000 80 013
25 mm	50	650 000 20 025	650 000 45 025	650 000 80 025
47 mm	50	650 000 20 047	650 000 45 047	650 000 80 047
50 mm	50	650 000 20 050	650 000 45 050	650 000 80 050
90 mm	25	650 000 20 090	650 000 45 090	650 000 80 090
100 mm	25	650 000 20 100	650 000 45 100	650 000 80 100
142 mm	25	650 000 20 142	650 000 45 142	650 000 80 142
220 mm	25	650 000 20 220	650 000 45 220	650 000 80 220

## Cellulose acetate membranes · PORAFILE® CA

These membranes of cellulose acetate have a low protein binding capacity and are suited for aqueous and alcoholic media. The membranes are hydrophilic and can be used for hot gases up to 180 °C. They can be sterilised.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.45 µm	Pore size 0.8 µm	Pore size 1.2 µm
13 mm	100	680 000 20 013	680 000 45 013	680 000 80 013	680 00 120 013
25 mm	100	680 000 20 025	680 000 45 025	680 000 80 025	680 00 120 025
47 mm	100	680 000 20 047	680 000 45 047	680 000 80 047	680 00 120 047
50 mm	100	680 000 20 050	680 000 45 050	680 000 80 050	680 00 120 050
90 mm	50	680 000 20 090	680 000 45 090	680 000 80 090	680 00 120 090
100 mm	25	680 000 20 100	680 000 45 100	680 000 80 100	680 00 120 100
142 mm	25	680 000 20 142	680 000 45 142	680 000 80 142	680 00 120 142
220 mm	25	680 000 20 220	680 000 45 220	680 000 80 220	680 00 120 220

## Nitrocellulose membranes · PORAFILE® NC

PORAFILE® NC membranes are made from cellulose nitrate. They are easily wettable and suited for filtration of aqueous solutions. In dry atmosphere these membranes are thermally stable to 125 °C and can be autoclaved at 121 °C.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.45 µm
13 mm	50	657 002 00 13	657 004 50 13
25 mm	50	657 002 00 25	657 004 50 25
47 mm	50	657 002 00 47	657 004 50 47
50 mm	50	657 002 00 50	657 004 50 50
90 mm	50	657 002 00 90	657 004 50 90
100 mm	25	657 002 01 00	657 004 51 00
142 mm	25	657 002 01 42	657 004 51 42
220 mm	25	657 002 02 20	657 004 52 20



## Polytetrafluoroethylene membranes · PORAFIL® TE

Membranes of polytetrafluoroethylene (PTFE) are particularly suited for aggressive media, since they are chemically inert towards aqueous and organic solutions as well as towards concentrated acids and bases. These membranes are hydrophobic, thus the pressure for filtration of aqueous solutions has to be higher than the breakthrough pressure. PORAFIL® TE membranes can be used at temperatures up to 145 °C.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.45 µm	Pore size 1.0 µm	Pore size 3.0 µm
13 mm	50	670 020 013	670 045 013	670 100 013	670 300 013
25 mm	50	670 020 025	670 045 025	670 100 025	670 300 025
47 mm	50	670 020 047	670 045 047	670 100 047	670 300 047
50 mm	50	670 020 050	670 045 050	670 100 050	670 300 050
90 mm	25	670 020 090	670 045 090	670 100 090	670 300 090
100 mm	25	670 020 100	670 045 100	670 100 100	670 300 100
142 mm	10	670 020 142	670 045 142	670 100 142	670 300 142
220 mm	10	670 020 220	670 045 220	670 100 220	670 300 220

## Polyester membranes · PORAFIL® PE

Polyester membranes are hydrophilic and particularly suited for fine filtration, dust analysis, aerosol analysis and ultra-purification of solvents.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.4 µm	Pore size 1.0 µm	Pore size 5.0 µm
13 mm	100	671 020 013	671 040 013	671 100 013	671 500 013
25 mm	100	671 020 025	671 040 025	671 100 025	671 500 025
37 mm	100	671 020 037	671 040 037	671 100 037	671 500 037
47 mm	100	671 020 047	671 040 047	671 100 047	671 500 047
50 mm	100	671 020 050	671 040 050	671 100 050	671 500 050

## Regenerated cellulose membranes · PORAFIL® RC

Membranes of regenerated cellulose are resistant towards most organic solvents. They are e.g. used for filtration of solvent mixtures and ultrapurification and degassing of HPLC eluents.

### Ordering information

Ø	Pack of	Pore size 0.2 µm	Pore size 0.45 µm
13 mm	100	659 020 013	659 045 013
25 mm	100	659 020 025	659 045 025
47 mm	100	659 020 047	659 045 047
50 mm	100	659 020 050	659 045 050
100 mm	25	659 020 100	659 045 100
142 mm	25	659 020 142	659 045 142

## Polycarbonate membranes · PORAFIL® PC

Polycarbonate membranes are mainly used for the determination of AOX.

### Ordering information


Ø	Pack of	Pore size 0.40 µm
25 mm	100	676 040 025
47 mm	100	676 040 047
50 mm	100	676 040 050

## CHROMAFIL® MULTI 96 filters

CHROMAFIL® MULTI 96 filter plates are very well suited for efficient filtration in 96-well microtiter plate format.

### Ordering information

Material of the filter elements	Pore size	Plates per pack	REF
MV (cellulose mixed esters)	0.20 µm	1	738770.M
MV (cellulose mixed esters)	0.45 µm	1	738771.M
RC (regenerated cellulose)	0.20 µm	1	738656.M
RC (regenerated cellulose)	0.45 µm	1	738657.M
PTFE (polytetrafluoroethylene)	0.20 µm	1	738660.M
PTFE (polytetrafluoroethylene)	0.45 µm	1	738661.M
PTFE (polytetrafluoroethylene)	1.00 µm	1	738662.M
PTFE (polytetrafluoroethylene)	3.00 µm	1	738663.M
PE (polyethylene)	20 µm	1	738655.M
PE (polyethylene)	50 µm	1	738659.M
Glass fibre nominal	1 µm	1	738655.2M
Glass fibre nominal	3 µm	1	738658.M
CHROMABOND® MULTI 96 vacuum manifold for monoblocks, with reservoir tank, vacuum gauge and control valve, required for filtration with 96-well filter plates		1	738630.M

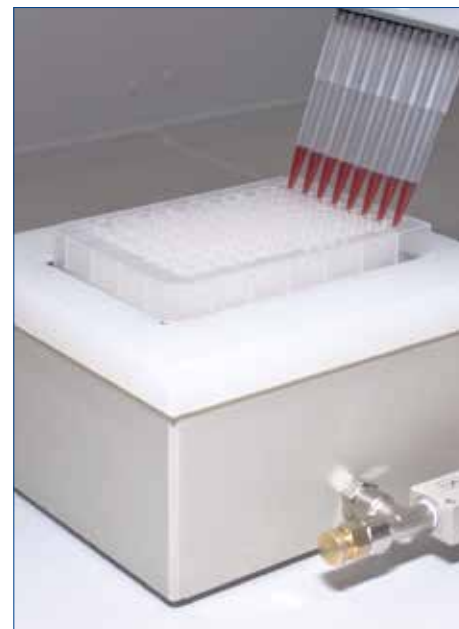

## CHROMAFIL® filtration cartridges

- Filtration cartridges for sample clarification under vacuum (e.g., using the CHROMABOND® vacuum manifold or SPE automation systems like Gilson Aspec™, Rapidtrace®) or by gravity
- Cartridge sizes 3 mL and 6 mL
- Different membranes (PET, RC, PTFE, PVDF, GF) and pore sizes (0.2, 0.45 and 1.0 µm). Membrane materials correspond to the respective CHROMAFIL® syringe filters.



### Ordering information

Description	Pore size	Pack of	Column volume	
			3 mL	6 mL
Filtration cartridges PET (polyester)	0.20 µm	100	730578.320	730578.620
Filtration cartridges PET (polyester)	0.45 µm	100	730578.345	730578.645
Filtration cartridges RC (regenerated cellulose)	0.20 µm	100	730068.320	730068.620
Filtration cartridges RC (regenerated cellulose)	0.45 µm	100	730068.345	730068.645
Filtration cartridges PTFE (polytetrafluoroethylene)	0.20 µm	100	730570.320	730570.620
Filtration cartridges PTFE (polytetrafluoroethylene)	0.45 µm	100	730570.345	730570.645
Filtration cartridges PVDF (polyvinylidene difluoride)	0.20 µm	100	730579.320	730579.620
Filtration cartridges PVDF (polyvinylidene difluoride)	0.45 µm	100	730579.345	730579.645
Filtration cartridges GF (glass fiber)	nom. 1.0	100	730517.3100	730517.6100

## CHROMAFIL® syringe filters

Disposable syringe filters CHROMAFIL® are ready-to-use filtration units, which are filter elements incorporated in a polypropylene housing. Because every filter is only used once, contaminations are avoided.

### CHROMAFIL® Xtra

- Labeled for method validation and certification
- Imprint for direct identification of the membrane type, diameter and pore size
- Low bleeding PP housing
- Color-free plain polypropylene

### CHROMAFIL® BIG-BOX

- 400 (25 mm) or 800 (15 mm) color-coded quality syringe filters
- 400 labeled Xtra syringe filters
- Food safe PE box with screw cap
- Economical prices

### Recommended filter sizes for different volumes

sample volume	recommended filter Ø
≤ 1 mL	3 mm
1–5 mL	15 mm
5–100 mL	25 mm



### CHROMAFIL® Combi filters

Combi syringe filters with a coarse glass fiber prefilter and a small-pore membrane as main filter

#### User benefits:

- For solutions with a high load of particulate matter: lower back pressure, easy filtration
- For high yields of filtrate: more mL of pure filtrate per filter

#### The technology:

The glass fiber membrane (1.0 µm) removes coarse particles, before they can block the fine main membrane. This results in a better filtration efficiency, especially for highly contaminated samples.

Housing: Solvent-resistant, ultra low bleed polypropylene

Inlet: Luer lock


Exit: Luer

Pore diameter: 1.0/0.20 µm or 1.0/0.45 µm

Filter diameter: 25 mm

Void volume: < 80 µL


Packing unit: 100 filters; BIG-BOX with 400 filters

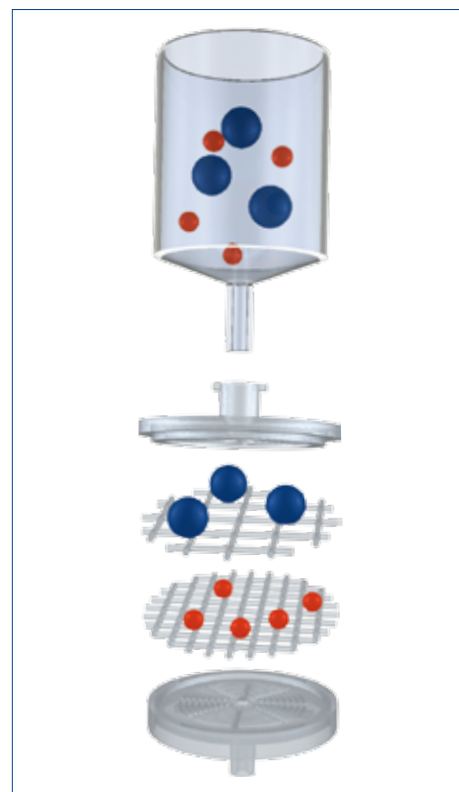



## CHROMAFIL® GF/PET (polyester with glass fiber prefilter)

- Hydrophilic multipurpose membrane for polar as well as nonpolar solvents
- The HPLC filter with glass fiber prefilter, especially suited for mixtures of water and organic solvents
- Recommended for solutions with a high load of particulate matter or for highly viscous solutions

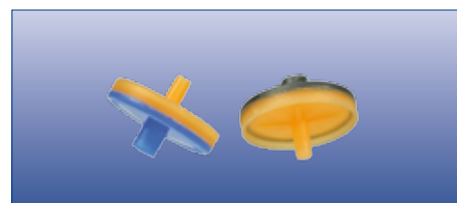


### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL®</b>								
GF/PET-20/25	1.0/0.20 µm	25 mm	blue	orange	100	729032	400	729032.400
GF/PET-45/25	1.0/0.45 µm	25 mm	black	orange	100	729033	400	729033.400

## CHROMAFIL® GF/RC (regenerated cellulose with glass fiber prefilter)

- Hydrophilic membrane for aqueous and organic-aqueous liquids, i. e. polar and medium polar sample solutions
- Recommended for solutions with a high load of particulate matter or for highly viscous aqueous solutions

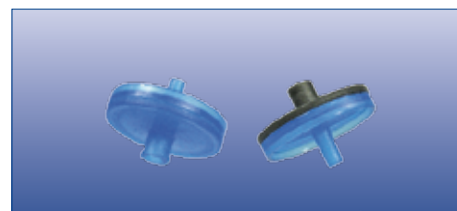

### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL®</b>								
GF/RC-20/25	1.0/0.20 µm	25 mm	blue	blue	100	729050	400	729050.400
GF/RC-45/25	1.0/0.45 µm	25 mm	black	blue	100	729051	400	729051.400

## CHROMAFIL® GF/PVDF (polyvinylidene difluoride with glass fiber prefilter)

- Hydrophilic membrane
- Recommended for filtration of biological samples with high particle loads. This filter features a high binding capacity for proteins.
- Suited for filtration of aqueous solutions



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL®</b>								
GF/P-45/25	1.0/0.45 µm	25 mm	black	white	100	729039	400	729039.400

## CHROMAFIL® PET (polyester)

- Hydrophilic multipurpose membrane
- For polar as well as nonpolar solvents
- The HPLC filter, especially suited for mixtures of water and organic solvents
- For TOC/DOC determination
- Not cytotoxic, does not inhibit the growth of microorganisms and higher cells



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
PET-20/25	0.20 µm	25 mm	labeled		100	729221	400	729221.400
PET-45/25	0.45 µm	25 mm	labeled		100	729220	400	729220.400
PET-120/25	1.2 µm	25 mm	labeled		100	729229	400	729229.400
<b>CHROMAFIL®</b>								
PET-20/15 MS	0.20 µm	15 mm	yellow	orange	100	729022	800	729022.800
PET-45/15 MS	0.45 µm	15 mm	colorless	orange	100	729023	800	729023.800
PET-20/25	0.20 µm	25 mm	yellow	orange	100	729021	400	729021.400
PET-45/25	0.45 µm	25 mm	colorless	orange	100	729020	400	729020.400

MS = minispikes on filter exit

## CHROMAFIL® RC (regenerated cellulose)

- Hydrophilic membrane with very low adsorption
- For aqueous and organic/aqueous liquids, i. e. polar and medium polar sample solutions
- Binding capacity for proteins 84 µg/per 25 mm filter



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
RC-20/25	0.20 µm	25 mm	labeled		100	729230	400	729230.400
RC-45/25	0.45 µm	25 mm	labeled		100	729231	400	729231.400
<b>CHROMAFIL®</b>								
RC-20/15 MS	0.20 µm	15 mm	yellow	blue	100	729036	800	729036.800
RC-45/15 MS	0.45 µm	15 mm	colorless	blue	100	729037	800	729037.800
RC-20/25	0.20 µm	25 mm	yellow	blue	100	729030	400	729030.400
RC-45/25	0.45 µm	25 mm	colorless	blue	100	729031	400	729031.400

MS = minispikes on filter exit

## CHROMAFIL® PTFE (polytetrafluoroethylene)

- Hydrophobic membrane
- For nonpolar liquids and gases
- Very resistant towards all kinds of solvents as well as acids and bases
- Flushing with alcohol, followed by water, makes the originally hydrophobic membrane more hydrophilic



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
PTFE-20/25	0.20 µm	25 mm	labeled		100	729207	400	729207.400
PTFE-45/25	0.45 µm	25 mm	labeled		100	729205	400	729205.400
PTFE-100/25	1.0 µm	25 mm	labeled		100	729247	400	729247.400
<b>CHROMAFIL®</b>								
O-20/3	0.20 µm	3 mm	colorless	colorless	100	729014		
O-45/3	0.45 µm	3 mm	colorless	colorless	100	729015		
O-20/15 MS	0.20 µm	15 mm	yellow	colorless	100	729008	800	729008.800
O-45/15 MS	0.45 µm	15 mm	colorless	colorless	100	729009	800	729009.800
O-20/25	0.20 µm	25 mm	yellow	colorless	100	729007	400	729007.400

MS = minispike on filter exit

## CHROMAFIL® CA (cellulose acetate)

- Hydrophilic membrane
- For filtration of water-soluble oligomers and polymers, especially suited for biological macromolecules
- Very high shape stability in aqueous solutions
- Extremely low binding capacity for proteins (21 µg/per 25 filter)
- Also available in a sterile package (S) for filtration under sterile conditions (each filter individually sealed)



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
CA-20/25	0.20 µm	25 mm	labeled		100	729226	400	729226.400
CA-45/25	0.45 µm	25 mm	labeled		100	729227	400	729227.400
<b>CHROMAFIL®</b>								
CA-20/15 MS	0.20 µm	15 mm	yellow	red	100	729054	800	729054.800
CA-45/15 MS	0.40 µm	15 mm	colorless	red	100	729055	800	729055.800
CA-20/25	0.20 µm	25 mm	yellow	red	100	729026	400	729026.400
CA-45/25	0.45 µm	25 mm	colorless	red	100	729027	400	729027.400
<b>CHROMAFIL® Sterile filters</b>								
CA-20/15 MS (S)	0.20 µm	15 mm	yellow	red	50	729052		
CA-45/15 MS (S)	0.45 µm	15 mm	colorless	red	50	729053		
CA-20/25 S	0.20 µm	25 mm	yellow	red	50	729024		
CA-45/25 S	0.45 µm	25 mm	colorless	red	50	729025		

MS = minispike on filter exit

## CHROMAFIL® MV (cellulose mixed esters)

- Hydrophilic membrane with very low adsorption
- For aqueous or polar solutions



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
MV-20/25	0.20 µm	25 mm	labeled		100	729206	400	729206.400
MV-45/25	0.45 µm	25 mm	labeled		100	729204	400	729204.400
<b>CHROMAFIL®</b>								
A-20/25	0.20 µm	25 mm	yellow	yellow	100	729006	400	729006.400
A-45/25	0.45 µm	25 mm	colorless	yellow	100	729004	400	729004.400

## CHROMAFIL® PES (polyethersulfone)

- Hydrophilic membrane
- For aqueous liquids and liquids with low organic contents
- Very low adsorption for pharmaceuticals and proteins
- Good stability against acids and bases
- Binding capacity for proteins 29 µg/per 25 mm filter



### Ordering information

Type	Pore size	Membrane Ø	Standard pack		BIG-BOX	
			pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>						
PES-20/25	0.20 µm	25 mm	100	729240	400	729240.400
PES-45/25	0.45 µm	25 mm	100	729241	400	729241.400
PES-500/25	5.0 µm	25 mm	100	729242	400	729242.400

## CHROMAFIL® GF (glass fiber)

- Inert filter, nominal pore size 1 µm, allows higher flow rates than small pore filters
- For solutions with high loads of particulate matter or for highly viscous solutions (e.g. soil samples, fermentation broths)
- As prefilters for other CHROMAFIL® filters, they prevent plugging of the membrane



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
GF-100/25	nom. 1.0 µm	25 mm	labeled		100	729228	400	729228.400
<b>CHROMAFIL®</b>								
GF-100/15 MS	nom. 1.0 µm	15 mm	blue	colorless	100	729034		
GF-100/25	nom. 1.0 µm	25 mm	yellow	black	100	729028	400	729028.400

## CHROMAFIL® PA (polyamide, nylon)

- Rather hydrophilic membrane
- For aqueous and organic / aqueous medium polar liquids

### Ordering information



Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
PA-20/25	0.20 µm	25 mm	labeled		100	729212	400	729212.400
PA-45/25	0.45 µm	25 mm	labeled		100	729213	400	729213.400
<b>CHROMAFIL®</b>								
AO-20/3	0.20 µm	3 mm	colorless	colorless	100	729010		
AO-45/3	0.45 µm	3 mm	colorless	colorless	100	729011		
AO-20/15 MS	0.20 µm	15 mm	yellow	green	100	729048	800	729048.800
AO-45/15 MS	0.45 µm	15 mm	colorless	green	100	729049	800	729049.800
AO-20/25	0.20 µm	25 mm	yellow	green	100	729012	400	729012.400
AO-45/25	0.45 µm	25 mm	colorless	green	100	729013	400	729013.400

MS = minispikes on filter exit

## CHROMAFIL® PVDF (polyvinylidene difluoride)

- Hydrophilic membrane
- For aqueous solutions, water-soluble oligomers and polymers like proteins
- Binding capacity for proteins 82 µg/per 25 mm filter



### Ordering information

Type	Pore size	Membrane Ø	Color code		Standard pack		BIG-BOX	
			top	bottom	pack of	REF	pack of	REF
<b>CHROMAFIL® Xtra</b>								
PVDF-20/25	0.20 µm	25 mm	labeled		100	729218	400	729218.400
PVDF-45/25	0.45 µm	25 mm	labeled		100	729219	400	729219.400
<b>CHROMAFIL®</b>								
PVDF-20/15 MS	0.20 µm	15 mm	yellow	white	100	729043	800	729043.800
PVDF-45/15 MS	0.45 µm	15 mm	colorless	white	100	729044	800	729044.800

MS = minispikes on filter exit



## pH indicator papers

### pH-Fix

pH-Fix test strips are the highly appreciate standard in many laboratories. The easy Dip & Read procedure provides reliable results in seconds. Due to the patented pH-Fix technology the indicator is chemically bound to the test pad. The dye does not wash out so clothes stay clean and samples remain pure.

#### Ordering information

Range	Gradation	REF
<b>Classic flat box</b>		
pH 0–14	0 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11 · 12 · 13 · 14	921 10
pH 0.0–6.0	0 · 0.5 · 1.0 · 1.5 · 2.0 · 2.5 · 3.0 · 3.5 · 4.0 · 4.5 · 5.0 · 5.5 · 6.0	921 15
pH 2.0–9.0 c€ <sup>2)</sup>	2.0 · 2.5 · 3.0 · 3.5 · 4.0 · 4.5 · 5.0 · 5.5 · 6.0 · 6.5 · 7.0 · 7.5 · 8.0 · 8.5 · 9.0	921 18
pH 4.5–10.0 c€ <sup>1)</sup>	4.5 · 5.0 · 5.5 · 6.0 · 6.5 · 7.0 · 7.5 · 8.0 · 8.5 · 9.0 · 9.5 · 10.0	921 20
pH 6.0–10.0	6.0 · 6.4 · 6.7 · 7.0 · 7.3 · 7.6 · 7.9 · 8.2 · 8.4 · 8.6 · 8.8 · 9.1 · 9.5 · 10.0	921 22
pH 7.0–14.0	7.0 · 7.5 · 8.0 · 8.5 · 9.0 · 9.5 · 10.0 · 10.5 · 11.0 · 11.5 · 12.0 · 12.5 · 13.0 · 13.5 · 14.0	921 25
pH 0.3–2.3	0.3 · 0.7 · 1.0 · 1.3 · 1.6 · 1.9 · 2.3	921 80
pH 1.7–3.8	1.7 · 2.0 · 2.3 · 2.6 · 2.9 · 3.2 · 3.5 · 3.8	921 90
pH 3.1–8.3 c€ <sup>3)</sup>	3.1 · 3.5 · 3.9 · 4.3 · 4.7 · 5.1 · 5.5 · 5.9 · 6.3 · 6.7 · 7.1 · 7.5 · 7.9 · 8.3	921 35
pH 3.6–6.1 c€ <sup>4)5)</sup>	3.6 · 4.1 · 4.4 · 4.7 · 5.0 · 5.3 · 5.6 · 6.1	921 30
pH 5.1–7.2	5.1 · 5.4 · 5.7 · 6.0 · 6.3 · 6.6 · 6.9 · 7.2	921 40
pH 6.0–7.7	6.0 · 6.4 · 6.7 · 7.0 · 7.3 · 7.7	921 50
pH 7.5–9.5	7.5 · 7.9 · 8.2 · 8.4 · 8.6 · 8.8 · 9.1 · 9.5	921 60
pH 7.9–9.8	7.9 · 8.3 · 8.6 · 8.9 · 9.1 · 9.4 · 9.8	921 70
<b>PlopTop tube</b>		
pH 0–14 PT	0 · 1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11 · 12 · 13 · 14	921 11
pH 4.5–10.0 PT c€ <sup>2)</sup>	4.5 · 5.0 · 5.5 · 6.0 · 6.5 · 7.0 · 7.5 · 8.0 · 8.5 · 9.0 · 9.5 · 10.0	921 21
pH 3.6–6.1 PT c€ <sup>4)5)</sup>	3.6 · 4.1 · 4.4 · 4.7 · 5.0 · 5.3 · 5.6 · 6.1	921 31

Presentation: packs of 100 strips 6 x 85 mm

c€: CE marked for the pH determination in

1) Urine 2) Gastric juice 3) Saliva 4) Vaginal secret according to the IVD directive 98/79/EG

5) Detection of disinfectant residues after rinsing of dialysis equipment according to the directive for medical products 93/42/EWG

### PEHANON®

PEHANON® is a special pH test strip that unifies the pH-indicator and the reference colors on one strip. It provides accurate results also for colored solutions.

#### Ordering information

Range	Gradation	REF
pH 1–12	1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11 · 12	904 01
pH 0–1.8	0 · 0.3 · 0.6 · 0.8 · 1.0 · 1.2 · 1.5 · 1.8	904 11
pH 1.0–2.8	1.0 · 1.3 · 1.6 · 1.8 · 2.0 · 2.2 · 2.5 · 2.8	904 12
pH 1.8–3.8	1.8 · 2.1 · 2.4 · 2.7 · 3.0 · 3.2 · 3.5 · 3.8	904 13
pH 2.8–4.6	2.8 · 3.1 · 3.4 · 3.6 · 3.8 · 4.0 · 4.3 · 4.6	904 14
pH 3.8–5.5	3.8 · 4.0 · 4.2 · 4.4 · 4.6 · 4.9 · 5.2 · 5.5	904 15
pH 4.0–9.0	4.0 · 4.5 · 5.0 · 5.5 · 6.0 · 6.5 · 7.0 · 7.5 · 8.0 · 8.5 · 9.0	904 24
pH 5.2–6.8	5.2 · 5.5 · 5.7 · 5.9 · 6.1 · 6.3 · 6.5 · 6.8	904 16
pH 6.0–8.1	6.0 · 6.3 · 6.6 · 6.9 · 7.2 · 7.5 · 7.8 · 8.1	904 17
pH 7.2–8.8	7.2 · 7.4 · 7.6 · 7.8 · 8.0 · 8.2 · 8.5 · 8.8	904 19
pH 8.0–9.7	8.0 · 8.2 · 8.4 · 8.6 · 8.8 · 9.1 · 9.4 · 9.7	904 20
pH 9.5–12.0	9.5 · 10.0 · 10.5 · 11.0 · 11.5 · 12.0	904 21
pH 10.5–13.0	10.5 · 11.0 · 11.5 · 12.0 · 12.5 · 13.0	904 22
pH 12.0–14.0	12.0 · 12.5 · 13.0 · 13.5 · 14.0	904 23

Presentation: packs of 200 strips 11 x 100 mm



## Universal and special indicator papers

pH indicator papers have been on the market for decades and are the appreciated standard for many applications. For each pH value these papers show a single color which can be matched with the color scale at intervals of 0.2–1 pH unit.

### Ordering information

Range	Gradation	REF
<b>Universal indicator paper</b>		
pH 1–11	1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11	902 01
pH 1–14	1 · 2 · 3 · 5 · 6 · 7 · 8 · 9 · 10 · 12 · 14	902 04
<b>Special indicator papers</b>		
pH 0.5–5.5	0.5 · 1.0 · 1.5 · 2.0 · 2.5 · 3.0 · 3.5 · 4.0 · 4.5 · 5.0 · 5.5	902 05
pH 3.8–5.8	<3.8 · 3.8 · 4.1 · 4.3 · 4.5 · 4.7 · 4.9 · 5.2 · 5.5 · 5.8 · >5.8	902 06
pH 4.0–7.0	4.0 · 4.3 · 4.6 · 4.9 · 5.2 · 5.5 · 5.8 · 6.1 · 6.4 · 6.7 · 7.0	902 07
pH 5.4–7.0	<5.4 · 5.4 · 5.7 · 6.0 · 6.2 · 6.4 · 6.7 · 7.0 · >7.0	902 08
pH 5.5–9.0	5.5 · 6.0 · 6.5 · 7.0 · 7.5 · 8.0 · 8.5 · 9.0	902 09
pH 6.4–8.0	<6.4 · 6.4 · 6.6 · 6.8 · 7.0 · 7.2 · 7.4 · 7.6 · 7.8 · 8.0 · >8.0	902 10
pH 7.2–9.7	<7.2 · 7.2 · 7.5 · 7.8 · 8.1 · 8.4 · 8.7 · 9.0 · 9.3 · 9.7 · >9.7	902 11
pH 8.0–10.0	8.0 · 8.2 · 8.4 · 8.7 · 9.0 · 9.2 · 9.6 · 10.0	902 12
pH 9.0–13.0	9.0 · 9.5 · 10.0 · 10.5 · 11.0 · 11.5 · 12.0 · 12.5 · 13.0	902 13
pH 12.0–14.0	12.0 · 12.5 · 13.0 · 13.5 · 14.0	902 14

Presentation: reels of 5 m x 7 mm

refill packs and booklets available on request



## Duotest and Tritest

Duotest indicator papers feature two indicator zones separated by a hydrophobic barrier. This facilitates clear assignment of the pH and allows estimation of intermediate values. Tritest indicator papers feature three different indicator zone for a precise assignment of pH values.

### Ordering information

Range	Gradation	REF
<b>Duotest</b>		
pH 1–12	1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11 · 12	903 01
pH 1.0–4.3	1.0 · 1.3 · 1.6 · 1.9 · 2.2 · 2.5 · 2.8 · 3.1 · 3.4 · 3.7 · 4.0 · 4.3	903 02
pH 3.5–6.8	3.5 · 3.8 · 4.1 · 4.4 · 4.7 · 5.0 · 5.3 · 5.6 · 5.9 · 6.2 · 6.5 · 6.8	903 03
pH 5.0–8.0	5.0 · 5.3 · 5.6 · 5.9 · 6.2 · 6.5 · 6.8 · 7.1 · 7.4 · 7.7 · 8.0	903 04
pH 7.0–10.0	7.0 · 7.3 · 7.6 · 7.9 · 8.2 · 8.5 · 8.8 · 9.1 · 9.4 · 9.7 · 10.0	903 05
pH 9.5–14.0	9.5 · 10.0 · 10.5 · 11.0 · 11.5 · 12.0 · 12.5 · 13.0 · 13.5 · 14.0	903 06
<b>Tritest</b>		
pH 1–11	1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11	905 01
<b>Tritest L</b>		
pH 1–11	1 · 2 · 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 · 11	905 10

Duotest and Tritest: reels of 5 m x 10 mm

Tritest L: reels of 6 m x 14 mm

refill packs available on request



## Test papers for qualitative analysis

Test papers allow the qualitative determination of ions and chemical compounds. They are used to detect if compounds tested for are present above the specific detection limit. Some of the papers have specific applications.

### Ordering information

Determination of	Test paper / Test strips	Presentation	REF
Alkaline phosphatase in milk	Phosphatesmo MI	50 test strips 10 x 95 mm	906 12
Aluminium ions (Al <sup>3+</sup> )	Aluminium test paper	100 strips 20 x 70 mm	907 21
Ammonia, ammonium ions (NH <sub>3</sub> , NH <sub>4</sub> <sup>+</sup> )	Ammonium test paper*	200 strips 20 x 70 mm	907 22
Antimony ions (Sb <sup>3+</sup> )	Antimony test paper	200 strips 20 x 70 mm	907 23
Arsenic, arsine (As, AsH <sub>3</sub> )	Arsenic test paper* = Mercury bromide paper	200 strips 20 x 70 mm	907 62
Bismuth ions (Bi <sup>3+</sup> )	Bismuth test paper	200 strips 20 x 70 mm	907 33
Blood traces (Peroxidase)	Peroxtesmo KM	25 sheets 15 x 30 mm	906 05
Boric acid, borates (H <sub>3</sub> BO <sub>3</sub> , BO <sub>3</sub> <sup>3-</sup> )	Turmeric paper	200 strips 20 x 70 mm	907 47
Chlorine, free halogens	Chlortesmo Potassium iodide starch paper (see "Nitrite ions")	200 strips 20 x 70 mm	906 03
Chromium, chromate (Cr(VI), CrO <sub>4</sub> <sup>2-</sup> )	Chromium test paper	200 strips 20 x 70 mm	907 24
Cobalt ions (Co <sup>2+</sup> )	Cobalt test paper	100 strips 20 x 70 mm	907 28
Copper, copper ions (Cu, Cu <sup>+</sup> , Cu <sup>2+</sup> )	Cuprotesmo	40 sheets 40 x 25 mm	906 01
Copper(II) ions (Cu <sup>2+</sup> )	Copper test paper	200 strips 20 x 70 mm	907 29
Cyanides, hydrocyanic acid (CN <sup>-</sup> , HCN)	Cyantesmo*	reel of 5 m length	906 04
Fluorides, hydrogen fluorides (F <sup>-</sup> , H <sub>2</sub> F <sub>2</sub> )	Fluoride test paper	200 strips 20 x 70 mm	907 50
Halogens, especially free chlorine	Chlortesmo	200 strips 20 x 70 mm	906 03
Hydrogen sulfide (H <sub>2</sub> S), sulfide ions (S <sup>2-</sup> )	Lead acetate paper* Sulfide test paper	reel of 5 m length refill pack of 3 rolls booklet with 100 strips 10 x 75 mm	907 44 907 45 907 46 907 61
Iron(II) ions (Fe <sup>2+</sup> )	Dipyridyl paper	200 strips 20 x 70 mm	907 25
Iron ions (Fe <sup>2+</sup> , Fe <sup>3+</sup> )	Iron test paper	100 strips 20 x 70 mm	907 26
Lactoperoxidase in milk	Peroxtesmo MI	100 strips 15 x 15 mm	906 27
Lead, lead ions (Pb, Pb <sup>2+</sup> )	Plumbtesmo	40 sheets 40 x 25 mm	906 02
Mastitis	Udder test paper	PE bag with 20 sheets	907 48
Nickel(II) ions (Ni <sup>2+</sup> )	Nickel test paper	200 strips 20 x 70 mm	907 30
Nitrate and nitrite (NO <sub>3</sub> <sup>-</sup> , NO <sub>2</sub> <sup>-</sup> )	Nitratesmo	reel of 5 m length	906 11

\* This product contains harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.



Determination of	Test paper / Test strips	Presentation	REF
Nitrite ions (NO <sub>2</sub> <sup>-</sup> ), nitrous acid (HNO <sub>2</sub> ), ozone (O <sub>3</sub> )	Potassium iodide starch paper MN 816 N (normal sensitivity)	reel of 5 m length	907 54
		refill pack of 3 rolls	907 55
		booklet of 100 strips 10 x 75 mm	907 56
	Potassium iodide starch paper MN 616 T (for spot tests)	200 strips 20 x 70 mm	907 58
Oil in water and soil	Oil test paper	100 strips 20 x 70 mm	907 60
Peroxidase in foodstuffs	Peroxtesmo KO	100 sheets 15 x 15 mm	906 06
Peroxidase in milk	Peroxtesmo MI	100 sheets 15 x 15 mm	906 27
Potassium ions (K <sup>+</sup> )	Potassium test paper	200 sheets 20 x 70 mm	907 27
Protein residues	INDIPRO	60 test strips 10 x 95 mm and reagents	907 65
Reducing agents, SO <sub>2</sub> , sulfite ions	Potassium iodate starch paper	reel of 5 m length	907 53
Silver ions (Ag <sup>+</sup> )	Silver test paper	200 strips 20 x 70 mm	907 32
Sulfur dioxide (SO <sub>2</sub> ), sulfite ions	Sulfite test paper	100 strips 20 x 70 mm	907 63
Sperm, acid phosphatase	Phosphatesmo KM	25 sheets 15 x 30 mm	906 07
Vat dyes, end point of conversion	Indanthrene yellow paper	200 strips 20 x 70 mm	907 51
Water on the bottom of fuel tanks	AQUATEC test sticks	100 strips 10 x 200 mm	907 42
Water in org. solvents	Watesmo	reel of 5 m length	906 09
Water distribution in butter	Water	50 sheets 78 x 40 mm	906 10
Zirconium ions (Zr <sup>4+</sup> )	Zirconium test paper	100 strips 20 x 70 mm	907 21

\* This product contains harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.





## QUANTOFIX® test strips for semi-quantitative determinations

QUANTOFIX® test strips can be used for a large variety of different substances. In most cases an easy Dip & Read procedure provides reliable results in 10–120 seconds. As labs in a pocket QUANTOFIX® test strips are easy to use for professional analysts as well as chemical laymen.



### Ordering information

Test	Gradation	REF
QUANTOFIX® Active oxygen	0 · 4 · 8 · 15 · 25 mg/L active oxygen (MPS)	913 49
QUANTOFIX® Aluminum* <sup>1)</sup>	0 · 5 · 20 · 50 · 200 · 500 mg/L Al <sup>3+</sup>	913 07
QUANTOFIX® Ammonium* <sup>1)</sup>	0 · 10 · 25 · 50 · 100 · 200 · 400 mg/L NH <sub>4</sub> <sup>+</sup>	913 15
QUANTOFIX® Arsenic 50* <sup>1)</sup>	0 · 0.05 · 0.1 · 0.5 · 1.0 · 1.7 · 3.0 mg/L As <sup>3+/5+</sup>	913 32
QUANTOFIX® Arsenic 10* <sup>1)</sup>	0 · 0.01 · 0.025 · 0.05 · 0.1 · 0.5 mg/L As <sup>3+/5+</sup>	913 34
QUANTOFIX® Arsenic Sensitive* <sup>1)</sup>	0 · 0.005 · 0.01 · 0.025 · 0.05 · 0.1 · 0.25 · 0.5 mg/L As <sup>3+/5+</sup>	913 45
QUANTOFIX® Ascorbic acid	0 · 50 · 100 · 200 · 300 · 500 · 1000 · 2000 mg/L vitamin C	913 14
QUANTOFIX® Calcium <sup>1)</sup>	0 · 10 · 25 · 50 · 100 mg/L Ca <sup>2+</sup>	913 24 <sup>2)</sup>
QUANTOFIX® Carbonate hardness	0 · 3.8 · 7.5 · 12.5 · 18.8 · 25.0 °e	913 23
QUANTOFIX® Chloride	0 · 500 · 1000 · 1500 · 2000 · ≥ 3000 mg/L Cl <sup>-</sup>	913 21
QUANTOFIX® Chlorine Sensitive C€	0 · 0.1 · 0.5 · 1 · 3 · 10 mg/L Cl <sub>2</sub>	913 39
QUANTOFIX® Chlorine* <sup>1)</sup>	0 · 1 · 3 · 10 · 30 · 100 mg/L Cl <sub>2</sub>	913 17
QUANTOFIX® Chromate* <sup>1)</sup>	0 · 3 · 10 · 30 · 100 mg/L CrO <sub>4</sub> <sup>2-</sup>	913 01
QUANTOFIX® Cobalt	0 · 10 · 25 · 50 · 100 · 250 · 500 · 1000 mg/L Co <sup>2+</sup>	913 03
QUANTOFIX® Copper	0 · 10 · 30 · 100 · 300 mg/L Cu <sup>+/2+</sup>	913 04
QUANTOFIX® Cyanide* <sup>1)</sup>	0 · 1 · 3 · 10 · 30 mg/L CN <sup>-</sup>	913 18
QUANTOFIX® EDTA	0 · 100 · 200 · 300 · 400 mg/L EDTA	913 35
QUANTOFIX® Formaldehyde* <sup>1)</sup>	0 · 10 · 20 · 40 · 60 · 100 · 200 mg/L HCHO	913 28
QUANTOFIX® Glucose	0 · 50 · 100 · 250 · 500 · 1000 · 2000 mg/L glucose	913 48
QUANTOFIX® Glutaraldehyde C€	0 · 0.5 · 1 · 1.5 · 2 · 2.5 % glutaraldehyde	913 43
QUANTOFIX® Total Iron 100	0 · 2 · 5 · 10 · 25 · 50 · 100 mg/L Fe <sup>2+/3+</sup>	913 44
QUANTOFIX® Total Iron 1000	0 · 5 · 20 · 50 · 100 · 250 · 500 · 1000 mg/L Fe <sup>2+/3+</sup>	913 30
QUANTOFIX® LubriCheck	0 · 15 · 50 · 75 · 130 · 200 mmol/L KOH	913 36
QUANTOFIX® Molybdenum* <sup>1)</sup>	0 · 5 · 20 · 50 · 100 · 250 mg/L Mo <sup>6+</sup>	913 25
QUANTOFIX® Nickel	0 · 10 · 25 · 50 · 100 · 250 · 500 · 1000 mg/L Ni <sup>2+</sup>	913 05
QUANTOFIX® Nitrate/Nitrite	0 · 10 · 25 · 50 · 100 · 250 · 500 mg/L NO <sub>3</sub> <sup>-</sup> 0 · 1 · 5 · 10 · 20 · 40 · 80 mg/L NO <sub>2</sub> <sup>-</sup>	913 13
QUANTOFIX® Nitrite	0 · 1 · 5 · 10 · 20 · 40 · 80 mg/L NO <sub>2</sub> <sup>-</sup>	913 11
QUANTOFIX® Nitrite 3000	0 · 0.1 · 0.3 · 0.6 · 1 · 2 · 3 g/L NO <sub>2</sub> <sup>-</sup>	913 22
QUANTOFIX® Nitrite/pH	0 · 1 · 5 · 10 · 20 · 40 · 80 mg/L NO <sub>2</sub> <sup>-</sup> pH 6.0 · 6.4 · 6.7 · 7.0 · 7.3 · 7.6 · 7.9 · 8.2 · 8.4 · 8.6 · 8.8 · 9.0 · 9.3 · 9.6	913 38
QUANTOFIX® Peracetic acid 50 C€	0 · 5 · 10 · 20 · 30 · 50 mg/L peracetic acid	913 40
QUANTOFIX® Peracetic acid 500 C€	0 · 50 · 100 · 200 · 300 · 400 · 500 mg/L peracetic acid	913 41
QUANTOFIX® Peracetic acid 2000 C€	0 · 500 · 1000 · 1500 · 2000 mg/L peracetic acid	913 42
QUANTOFIX® Peroxide 25	0 · 0.5 · 2 · 5 · 10 · 25 mg/L H <sub>2</sub> O <sub>2</sub>	913 19
QUANTOFIX® Peroxide 100 C€	0 · 1 · 3 · 10 · 30 · 100 mg/L H <sub>2</sub> O <sub>2</sub>	913 12
QUANTOFIX® Peroxide 1000	0 · 50 · 150 · 300 · 500 · 800 · 1000 mg/L H <sub>2</sub> O <sub>2</sub>	913 33
QUANTOFIX® Phosphate* <sup>1)</sup>	0 · 3 · 10 · 25 · 50 · 100 mg/L PO <sub>4</sub> <sup>3-</sup>	913 20
QUANTOFIX® Potassium <sup>1)</sup>	0 · 200 · 400 · 700 · 1000 · 1500 mg/L K <sup>+</sup>	913 16
QUANTOFIX® QUAT	0 · 10 · 25 · 50 · 100 · 250 · 500 · 1000 mg/L benzalkonium-chloride	913 37
QUANTOFIX® Silver	0 · 1 · 2 · 3 · 5 · 7 · 10 g/L Ag <sup>+</sup>	913 50
QUANTOFIX® Sulfate	< 200 · > 400 · > 800 · > 1200 · > 1600 mg/L SO <sub>4</sub> <sup>2-</sup>	913 29
QUANTOFIX® Sulfite	0 · 10 · 25 · 50 · 100 · 250 · 500 · 1000 mg/L SO <sub>3</sub> <sup>2-</sup>	913 06
QUANTOFIX® Tin	0 · 10 · 25 · 50 · 100 · 250 · 500 mg/L Sn <sup>2+</sup>	913 09
QUANTOFIX® Zinc <sup>1)</sup>	0 · 2 · 5 · 10 · 25 · 50 · 100 mg/L Zn <sup>2+</sup>	913 10



Test	Gradation	REF
QUANTOFIX® for aquarium owners	total hardness 0 · 6.3 · 12.5 · 18.8 · 25.0 · 31.3 °e carbonate hardness 0 · 3.8 · 7.5 · 12.5 · 18.8 · 25.0 °e pH 6.4 · 6.8 · 7.2 · 7.6 · 8.0 · 8.4	913 26 913 27 <sup>3)</sup>

\* This product contains harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.

Container with 100 test strips 6 x 95 mm

<sup>1)</sup> The tests are supplied complete with all reagents required for the determination <sup>2)</sup> Container with 60 test strips

<sup>3)</sup> Container with 25 test strips

CE: CE-marked according to the directive for medical products 93/42/EWG

## Other test strips and papers for semi-quantitative determinations

### Ordering information

Determination of	Test paper / test strips	Gradation	Presentation	REF
Ammonia	Ammonia test	0 · 0.5 · 1 · 3 · 6 mg/L NH <sub>4</sub> <sup>+</sup>	25 test strips 7 x 60 mm	907 14
Chlorine	Chlorine test	0 · 10 · 50 · 100 · 200 mg/L Cl <sub>2</sub>	reel of 5 m x 10 mm	907 09
Fluoride ions	Fluoride test	0 · 2 · 5 · 10 · 20 · 50 · 100 mg/L F <sup>-</sup>	30 test disks + reagent	907 34
Halide ions	Saltesmo	0 · 0.25 · 0.5 · 1 · 2 · 3 · 4 · 5 g/L NaCl	30 test disks	906 08
Humidity in air (relative)	Moisture indicator*	20 · 30 · 40 · 50 · 60 · 70 · 80 %	12 adhesive labels 50 x 100 mm	908 01
	Moisture indicator*	8 %	1000 test papers 60 x 35 mm	908 901
	Moisture indicator without cobalt chloride	8 %	1000 test papers 60 x 35 mm	908 903
Ozone content in air	Ozone Test	< 90 · 90–150 · 150–210 · > 210 µg/m <sup>3</sup> O <sub>3</sub>	12 test strips 10 x 95 mm	907 36
QUATS	INDIQUAT	on request	reel of 5 m x 10 mm	909 000– 909 002
Silver	Ag-Fix (test strips)	0 · 0.5 · 1 · 2 · 3 · 5 · 7 · 10 g/L Ag <sup>+</sup> pH 4 · 5 · 6 · 7 · 8	100 test strips 6 x 95 mm	907 41
Swimming pool parameters	Swimming Pool Test 5 in 1	total hardness: 0 · 100 · 250 · 500 · 1000 mg/L CaCO <sub>3</sub> free chlorine: 0 · 0.5 · 1 · 3 · 5 · 10 mg/L Cl <sub>2</sub> total chlorine: 0 · 1 · 3 · 5 · 10 mg/L Cl <sub>2</sub> alkalinity: 0 · 80 · 120 · 180 · 240 mg/L CaCO <sub>3</sub> pH: 6.4 · 6.8 · 7.2 · 7.6 · 8.4	50 test strips 6 x 95 mm	907 59
	Swimming Pool Test 3 in 1	free chlorine, alkalinity, pH as above	50 test strips 6 x 95 mm	907 52
	Cyanuric acid test	0 · 50 · 100 · 150 · 300 ppm C <sub>3</sub> H <sub>3</sub> N <sub>3</sub> O <sub>3</sub>	25 test strips 6 x 95 mm	907 10
Water hardness	AQUADUR®	< 54 · > 90 · > 180 · > 270 · > 360 · > 450 ppm CaCO <sub>3</sub>	100 test strips 6 x 95 mm	912 01
		< 54 · > 72 · > 126 · > 252 · > 378 ppm CaCO <sub>3</sub>	100 test strips 6 x 95 mm	912 20
		< 54 · > 72 · > 151.2 · > 252 ppm CaCO <sub>3</sub>	100 test strips 6 x 95 mm	912 39
		< 54 · > 90 · > 180 · > 270 · > 360 · > 450 ppm CaCO <sub>3</sub>	1000 individual sealed strips	912 23
		< 54 · > 72 · > 126 · > 252 · > 378 ppm CaCO <sub>3</sub>	1000 individual sealed strips	912 24
		< 54 · > 72 · > 151.2 · > 252 · > 378 ppm CaCO <sub>3</sub>	1000 individual sealed strips	912 40
		< 54 · > 90 · > 180 · > 270 · > 360 · > 450 ppm CaCO <sub>3</sub>	5000 strips without color scale	912 21
		< 54 · > 72 · > 126 · > 252 · > 378 ppm CaCO <sub>3</sub>	5000 strips without color scale	912 22
		< 54 · > 90 · > 180 · > 270 · > 360 · > 450 ppm CaCO <sub>3</sub>	50 sets of 3 individual sealed strips	919 902
AQUADUR® Sensitive CE	0 · 5.4 · 10.8 · 19.8 ppm CaCO <sub>3</sub>	100 test strips 6 x 95 mm	912 10	

CE: CE-marked according to the directive for medical products 93/42/EWG

Application	Recommended MN product	Page
<b>A</b>		
Absorption		
large volumes of spilled, valueless liquids	cellu-cotton wadding MN 11 MN 713	on request 14
Acids, strong		
qualitative analysis	MN 1670, MN 1672, MN 1674	11
quantitative analysis	MN 1640 d, MN 1640 dd, MN 1640 de, MN 1640 m, MN 1640 md, MN 1640 w, MN 1640 we	9
Activated charcoal filters	MN 728	14, 16
Airborne germ analysis	membrane filters PORAFIL® CM	28
Air pollution monitoring	glass fibre filters MN GF-1, MN GF-6, MN 85/90 BF, MN QF-10	12
Alcohols	MN 751, MN 713	14, 15
Algae cultures	glass fibre filters MN GF-1	12
Alkaline solutions		
qualitative analysis	MN 1670, MN 1672, MN 1674	11
quantitative analysis	MN 1640 d, MN 1640 dd, MN 1640 de, MN 1640 m, MN 1640 md, MN 1640 w, MN 1640 we	9
Analytical filtration		
qualitative analysis	glass fibre filters MN 85/70, MN 85/90 MN 615, MN 616, MN 616 md, MN 617, MN 617 eh, MN 618, MN 619, MN 619 eh, MN 619 de, MN 1670, MN 1672, MN 1674	12 10 11
quantitative analysis	glass fibre filters MN 85/70 BF, MN 85/90 BF MN 640 d, MN 640 dd, MN 640 de, MN 640 m, MN 640 md, MN 640 w, MN 640 we MN 1640 d, MN 1640 dd, MN 1640 de, MN 1640 m, MN 1640 md, MN 1640 w, MN 1640 we	12 8 9
Anion exchange	ion exchange paper MN 616 LSB-50	21
Antibiotics, resistance testing	test disks MN 827 ATD, test stars MN 827 ATS/8	21
AOX determination	membrane filters PORAFIL® PC	30
Ash content	MN 640 w	20
Automation in sample preparation	CHROMAFIL® 96-well filter plates	31
<b>B</b>		
Bacterial cultures	glass fibre filters MN GF-1	12
Bases, strong		
qualitative analysis	MN 1670, MN 1672, MN 1674	11
quantitative analysis	MN 1640 d, MN 1640 de, MN 1640 m, MN 1640 md, MN 1640 w, MN 1640 we	9
Bauxite analysis	MN 640 m	8
Beer analysis filter for removing carbonic acid	MN 620 1/4	18
Beverage industry		
fruit juices, wine	MN 604, MN 875	14
shelf life control	membrane filter PORAFIL® CM	28
syrups, concentrates	MN 606	15
Biochemical solutions, clarification	glass fibre filters MN GF-5	12
Biological and biochemical cell analysis	glass fibre filters	12–13
Blaine test (surface determination of cement)	MN 640 w	8
Blotting papers	MN 218 B, MN 827 B, MN 440 B	23



Application	Recommended MN product	Page
<b>C</b>		
Cartridges for Filtration	CHROMAFIL®	31
Cation exchange	ion exchange paper MN 616 LSA-50	21
Cell analysis	glass fibre filters	12–13
Cell harvesting	glass fibre filters MN GF-6 PORAFILE® membrane filters	12 28–31
Chemists stores, covering tabels, cupboards, etc.	MN 713	14
Chimney gas samples	glass fibre filters MN GF-1	12
Chromatography papers	MN 214, MN 218, MN 260, MN 261, MN 827, MN 866	23
Clarification		
aggressive liquids	PORAFILE® membrane filters	28–30
aqueous solutions with low content of fine suspend particulates	glass fibre filters MN GF-3, MN 85/90	12
concentrated acids/bases	PORAFILE® membrane filters	28–30
with decoloring	activated charcoal filter paper MN 728	14
without decoloring	kieselguhr filter paper MN 660	19
Cleaning of optical glasses	lens tissue paper MN 13	21
Coffee, filtration	MN 850	15
Covering of lab benches, tables, cupboards etc.	LAB-TOP PE-coated paper MN 210 PE	22
Cuvettes, cleaning	lens tissue paper MN 13	21
Cytological analysis	membrane filters PORAFILE® CA, PORAFILE® RC	29, 30
<b>D</b>		
Dairy products microbiological examination	membrane filters PORAFILE® CM	28
Decarbonation of beer	MN 620 1/4, MN 615 1/4	18
Decoloring colored solutions, e.g. urine	activated charcoal filters MN 728	14
Desalting of water	MN 616 LSA-50, MN 616 LSB-50	21
Dirt control	membrane filters PORAFILE® CM	28
Disposable filters for sample preparation	CHROMAFIL® syringe filters	32–37
Double lactate method for soil analysis	MN 619 G 1/4	17
Drinking water, removal of suspended particules	glass fibre filters MN GF-3, MN 85/90	12
Drugs extracts from aqueous solutions, phase seperation filtration	MN 616 WA, MN 617 WA	19
Drug stores, covering tables, cupboards, etc	MN 713	14
Dust analysis from industrial and hot waste gases	glass fibre filter thimbles MN 649	25
Dyes	MN 751, MN 713	14, 15
<b>E</b>		
Edible oils, production	MN 553	15
Electroplating baths	activated charcoal filter paper MN 728 MN 440, MN 651	16 14, 15
Emulsions		
phase separation aqueous/organic	MN 616 WA, MN 617 WA	19
technical filtration	MN 818	14
Enamel, alkali metal analysis	MN 640 d, MN 640 m	8
Essences, extracts	MN 614 1/4, MN 875 1/4, MN 918 1/4	14, 15
Essential oils	MN 751, MN 713, MN 652, MN 605, MN 614, MN 651	14, 15
Exhaust gases see Wast gases		
Extraction		
phase separation aqueous/organic	MN 616 WA, MN 617 WA	19
Soxhlet	extraction thimbles in accordance with DIN 12449	24–25

Application	Recommended MN product	Page
<b>F</b>		
Fast filtration of fine precipitates	glass fibre filters	12–13
Fat analysis	MN 615 ff, MN 715 ff	18
Fibre-free filtration (e.g. injection solutions)	Wet-strengthened filters MN 1670, MN 1672, MN 1674	11
Fibre retention papers	MN 1670, MN 1672, MN 1674	11
Filter presses		
high mechanical demands	MN 753	15
standard grade	MN 553	15
Filterable solids	MN 640 w	20
Filtration cartridges	CHROMAFIL® filtration cartridges	31
Fine and sterile filtration		
of aqueous solutions	membrane filters PORAFIL® CM, PORAFIL® MV	28, 29
of vapour and air	membrane filters PORAFIL® TE	30
Fine dust, separation	membrane filters PORAFIL® CM	28
Fine precipitates, fast filtration	glass fibre filters	12–13
Finest particles down to 0.4 µm	glass fibre filters MN GF-5	12
Flue gas testing	MN 1817	on request
Fluorine detection	black filter paper MN 220	19
Food analysis	glass fibre filters MN GF-1	12
Fruit juices, clarification	MN 604, MN 875	14
<b>G</b>		
Galvanic see Electroplating baths		
Gases, industrial filtration	glass fibre filters MN 85/90, MN 85/90 BF	12
Gelatine	MN 751, MN 713, MN 652, MN 605, MN 651	14, 15
Germ testing	MN 621	14
Glazes, alkali metal analysis	MN 640 d, MN 640 m	8
Gravimetry	membrane filters PORAFIL® CM MN 640 d, MN 640 dd, MN 640 de, MN 640 m, MN 640 md, MN 640 w, MN 640 we	28 8
<b>H</b>		
HPLC sample preparation	CHROMAFIL® 96-well filter plates CHROMAFIL® filtration cartridges CHROMAFIL® syringe filters PORAFIL® membrane filters	31 31 32–37 28–31
Hydraulic fluids, examination	membrane filters PORAFIL® CM	28
Hydrocarbons	MN 440, MN 520, MN 866, MN 615	10, 14
Hydrophobic filters	MN 616 WA, MN 617 WA	19
Hydroxides,		
coarse-crystalline qualitative analysis	MN 617	10
quantitative analysis	MN 1640 w	9
<b>I</b>		
Industrial waste gases, dust analysis	glass fibre extraction thimbles MN 649	25
Ione exchange	MN 616 LSA-50, MN 616 LSB-50	21
Iron works, phosphorous analysis	MN 616 G	17
<b>K</b>		
Kieselguhr paper	MN 660	19



Application	Recommended MN product	Page
<b>L</b>		
Lacquers	MN 618, MN 605, MN 606, MN 751, MN 713	10, 14, 15
Large volumens of liquid, technical filtration	MN 675	14
Leather industry, filtration of resins	MN 615 1/4, MN 651 1/4	10, 15
Light precipitates, detection of small amounts	black filter paper MN 220	19
Lime fertilizer, clarification of aqueous solutions	MN 619 G 1/4	17
Lining of small animals' stables, cages etc	LAB-TOP PE-coated paper MN 210 PE	22
Liquids, clarification	glass fibre filters MN GF-2	12
<b>M</b>		
Malt analysis	MN 321	18
Margarine, water distribution analysis	MN 619 de	10
Metallographic sections, protective paper	lens tissue paper (José paper) lens tissue paper MN 13	21
Micro-nutrient analysis in soil	MN 280	17
Microscopic preparations, absorption of liquid	blocks MN 224	22
Milk serum, clarification	kieselguhr paper MN 660	19
Mouldings for X-ray fluorescence analysis	cellulose tablets MN 2104	16
<b>N</b>		
Nitrogen fertilizers, clarification of aqueous solutions	MN 619 G	17
Nucleic acid solutions, clarification	glass fibre filters MN GF-5	12
Nutrient media	MN 605, MN 606	15
<b>O</b>		
Oils	MN 605, MN 606	15
Optical glasses, cleaning	lens tissue paper MN 13	21
Organic drug and plant extracts, phase separation filtration	MN 616 WA, MN 617 WA	19
<b>P</b>		
Paper analysis	MN 640 m	8
Paper chromatography	MN 214, MN 218, MN 260, MN 261, MN 827, MN 866	23
Paraffin content in bitumen	MN 615	10
Particle analysis	membrane filters PORAFIL® CM	28
Particulate matter, removal	PORAFIL® membrane filters	28–31
Pets' cages, lining	LAB-TOP PE-coated paper MN 210 PE	22
pH measurement	pH indicator papers	38–39
Phages, larger viruses (concentration)	membrane filters PORAFIL® CA	29
Pharmacies, covering of tables, cupboards etc.	MN 713	14
Phase separation between aqueous and organic phase	MN 616 WA, MN 617 WA	19
Phosphorous analysis, phosphate-free filters	MN 617 G, MN 616 G, MN 619 G	17
Photoemulsions	MN 601	15
Plankton examination, optical purity control	membrane filters PORAFIL® CM	28
Plant extracts from aqueous solutions, phase separation filtration	MN 616 WA, MN 617 WA	19
Porous filter stone protection	MN 621	14
Potash fertilizers, clarification of aqueous solutions	MN 616 1/4, MN 619 G 1/4	17
Pre-filters for membrane filters	glass fibre filters MN GF-2, MN GF-4	12
Pressure filtration	MN 1640 w, MN 1640 m, MN 1640 md, MN 1640 d, MN 1640 de MN 1670, MN 1672, MN 1674	9
Process water, removal of suspended particles	glass fibre filters MN GF-3, MN 85/90	12



Application	Recommended MN product	Page
Protection of sensitive surfaces, lab benches	LAB-TOP PE-coated paper MN 210 PE	22
Protein filtration from aqueous and organic solutions	glass fibre filters MN GF-1, MN GF-5	12
<b>Q</b>		
Qualitative analysis filtration	MN 615, MN 616, MN 616 md, MN 617, MN 617 eh, MN 618, MN 619, MN 619 eh, MN 619 de, MN 1670, MN 1672, MN 1674	10–11
rapid tests	test papers for qualitative analysis	40–41
Quantitative analysis filtration	MN 640 d, MN 640 dd, MN 640 de, MN 640 m, MN 640 md, MN 640 w, MN 1640 d, MN 1640 dd, MN 1640 de, MN 1640 m MN 1640 w, MN 1640 we	8–9
rapid tests	test papers for semi-quantitative analysis	42–43
<b>R</b>		
Reagents, optical purity control	membrane filters PORAFIL® TE	30
Resin solutions	MN 652, MN 605, MN 651	15
<b>S</b>		
Salt solutions	MN 751, MN 713	14, 15
Sample preparation	CHROMAFIL® 96-well filter plates	31
	CHROMAFIL® filtration cartridges	31
	CHROMAFIL® syringe filters	32–37
Schöniger method, sulfur analysis	Filter paper cuts MN 640 mS	16
Scintillation counting	glass fibre filters MN GF-3, MN GF-6	12
Serum filtration	PORAFIL® membrane filters	28–31
Silicon, detection	black filter paper MN 220	19
Silicon, fast analysis	MN 640 we, MN 640 w	8
Small animals' cages, lining	LAB-TOP PE-coated paper MN 210 PE	22
Smelling strips for the perfume industry	MN 270 S	on request
Soil analysis		
determination of micro-nutrients	MN 280 1/4	17
Soil analysis, double lactate method	MN 619 G 1/4	17
Solids, determination in suspensions	glass fibre filters MN GF-2	12
Sparkler systems	MN 651	15
Spirits	MN 875, MN 751, MN 713, MN 614	14, 15
Spirits, sugared	MN 605, MN 652, MN 651	15
Spot tests, spot reaction papers	MN 640 d, MN 818, MN 260	8, 14, 23
Steel works, phosphorus analysis	MN 616 G	17
Sterile filtration	CHROMAFIL® CA syringe filters	35
	membrane filters PORAFIL® CM	28
Suction filters	MN 640 w	20
Sugar factories, weighing of samples	parchment sheets MN 40/25, weighing boats MN 808	20
Sugar industry	MN 672, MN 620, MN 631	14, 15
Sugar solutions, clarification	kieselguhr filter paper 660	19
Sulfates, fine-crystalline		
qualitative analysis	MN 619, MN 619 eh, MN 619 de	10
quantitative analysis	MN 640 dd, MN 640 d, MN 640 de	8
Sulfides, coarse-crystalline		
qualitative analysis	MN 617	10
quantitative analysis	MN 640 w	8
Sulfur analysis in hydrocarbons according to Schöniger	Filter paper cuts MN 640 mS	16



Application	Recommended MN product	Page
Syringe filters	CHROMAFIL®	32–37
Syrups	MN 751, MN 713, MN 652, MN 605, MN 651	14, 15
<b>T</b>		
Tannin solutions	MN 674, MN 619 de	10, 14
Tartaric acid, determination of potassium	MN 631	15
Technical filtration	technical filter papers and thick filter papers	14–15
Tinctures	MN 751, MN 713	14, 15
Transfer media for molecular biology and biochemistry	blotting papers	23
Transformer oils, regeneration	MN 621, MN 652, MN 672, MN 674, MN 180, MN 270	14, 15
Turbine oils, regeneration	MN 621, MN 652, MN 672, MN 674	14, 15
<b>U</b>		
Unstable precipitates in gravimetry	MN 640 we	8
Urine, clarification without decoloring	kieselguhr paper MN 660	19
Urine, decoloration for polarimetric determination of sugars	activated charcoal filter paper MN 728	16
<b>V</b>		
Vacuum filtration	MN 1640 we, MN 1640 w, MN 1640 m, MN 1640 md, MN 1640 d, MN 1640 de, MN 1670, MN 1672, MN 1674	9, 11
VENEMA analyzers in sugar factories	MN 672, rolls	14
Vinegar	MN 751, MN 713	14, 15
<b>W</b>		
Waste gases, determination of range of atmospheric transport with Liesegang-Glocke	filter thimbles MN 646	on request
dust collection from hot and industrial gases	glass fibre filter thimbles MN 649	25
Waste water analysis, filtration of large volumes	glass fibre filters	12–13
Waste water, removal of suspended particulates	glass fibre filters MN GF-3, MN 85/90 BF	12
Water analysis		
chemical	membrane filters PORAFIL® CM, PORAFIL® MV	28, 29
filtration of large volumes	glass fibre filters	12–13
radiochemical	MN 616 LSA-50, MN 616 LSB-50	21
Water-impermeable filters	MN 616 WA, MN 617 WA	16
Water pollution monitoring	glass fibre filters MN GF-6	12
Water softening	MN 616 LSA-50	10
Weibull-Stoldt, fat analysis	MN 615 ff 1/4	16
Weighing aids		
for viscous, pulpy, syrupy samples	weighing boats MN 808	20
for syrupy and semi-crystalline samples at sugar factories	parchment sheets MN 40/25	20
substitute for weighing boats	weighing paper MN 226	20
Wet-strengthened filter papers	MN 1670, MN 1672, MN 1674	11
Wine filtration	MN 604, MN 875	14
Wort (beer)	MN 751, MN 713	14, 15
<b>X</b>		
X-ray fluorescence analysis preparation of mouldings	cellulose tablets MN 2104	16
<b>Y</b>		
Yeast and mould fungi, collection	PORAFIL® membrane filters	28–30
Yeast detection	membrane filters PORAFIL® CM	28

## List of filter paper grades

Grade	Description	Page
MN 1	technical filter paper	on request
MN 11	cellu-cotton wadding, unbleached	on request
MN 40/25	parchment sheets, crushable	20
MN 52 K	polyester paper	17
MN 59	electrocardiographic contact paper	on request
MN 68	sterilizing paper	on request
MN 85/70	glass fibre paper	12
MN 85/70 BF	glass fibre paper without binder	13
MN 85/90	glass fibre paper	13
MN 85/90 BF	glass fibre paper without binder	13
MN 85/220	glass fibre paper	13
MN 85/220 BF	glass fibre paper without binder	13
MN 101	cellulose filter flocs	22
MN 112	glas fibre wadding	on request
MN 126/70	technical filter paper, creped	15
MN 180	thick filter paper	14
MN 210 PE	PE-coated filter paper LAB-TOP	22
MN 214	chromatography paper	23
MN 214 ff	chromatography paper	23
MN 218	chromatography paper	23
MN 218 B	blotting paper	23
MN 220	black filter paper	19
MN 224	adsorbent paper for microscopy	22
MN 226	weighing paper	20
MN 260	chromatography paper	23
MN 261	chromatography paper	23
MN 270	thick filter paper	14
MN 270 S	smelling strips	on request
MN 280	filter paper for soil analysis	17
MN 321	nitrogen-free filter paper	18
MN 440	thick filter paper	14
MN 440 B	blotting paper	23
MN 514	qualitative and technical filter paper, embossed	on request
MN 520	thick filter paper	14
MN 553	technical filter paper, creped	15
MN 601	technical filter paper, creped	15
MN 604	technical filter paper	14
MN 605	technical filter paper, creped	15
MN 606	technical filter paper, creped	15
MN 612	technical filter paper, embossed	15
MN 614	qualitative and technical filter paper, embossed	15, 18
MN 615	qualitative filter paper	10



Grade	Description	Page
MN 615 A	technical filter paper	14
MN 615 ff	fat-free filter paper	18
MN 616	qualitative filter paper	10
MN 616 G	phosphate-free filter paper	17
MN 616 LSA-50	cation exchange paper	21
MN 616 LSB-50	anion exchange paper	21
MN 616 md	qualitative filter paper	10
MN 616 WA	water impermeable (hydrophobic) filter paper	19
MN 617	qualitative filter paper	10
MN 617 G	phosphate-free filter paper	17
MN 617 WA	water impermeable (hydrophobic) filter paper	19
MN 617 we	qualitative filter paper	10
MN 618	qualitative filter paper	10
MN 619	qualitative and technical filter paper	10
MN 619 de	qualitative filter paper	10
MN 619 eh	qualitative filter paper	10
MN 619 G	phosphate-free filter paper	17
MN 620	technical filter paper, embossed	18
MN 621	technical filter paper	14
MN 625	technical filter paper	14
MN 631	technical filter paper, embossed	15
MN 640 d	ashless filter paper	8
MN 640 dd	ashless filter paper	8
MN 640 de	ashless filter paper	8
MN 640 m	ashless filter paper	8
MN 640 md	ashless filter paper	8
MN 640 mS	filter paper cuts for Schöniger method	16
MN 640 w	ashless filter paper	20
MN 640 we	ashless filter paper	8
MN 645	cellulose extraction thimbles	24
MN 645 D	cellulose extraction thimbles	24
MN 645 F	cellulose extraction thimbles	24
MN 645 R	cellulose extraction thimbles	24
MN 645 W	cellulose extraction thimbles	24
MN 646	cellulose filter thimbles for Liesgang-Glocke	on request
MN 649	glass fibre extraction thimbles	25
MN 649 R	glass fibre filter thimbles	25
MN 651	technical filter paper, creped	15
MN 651/120	technical filter paper, creped	15
MN 652	technical filter paper, creped	15
MN 660	kieselguhr-filter paper	19
MN 672	technical filter paper, wet-strengthened	14
MN 674	technical filter paper, wet-strengthened	14
MN 675	technical filter paper	14



Grade	Description	Page
MN 692	technical filter paper, creped	15
MN 704	technical filter paper	on request
MN 713	technical filter paper	14
MN 714	technical filter paper	on request
MN 715	fat-free filter paper	18
MN 728	activated charcoal filter paper	14, 16
MN 750 N	technical filter paper, creped	15
MN 751	technical filter paper, creped	15
MN 753	technical filter paper, creped	15
MN 804	technical filter paper	14
MN 807	nitrogen-free filter paper	on request
MN 808	weighing boats	20
MN 818	thick filter paper	14
MN 818 GT	Guthrie test cards	on request
MN 827	thick filter paper, also suited for chromatography	14, 23
MN 827 ATD	antibiotic test disks	21
MN 827 ATS	antibiotic test stars	21
MN 827 B	blotting paper	23
MN 835	thick filter paper	14
MN 850	technical filter paper, creped	15
MN 866	thick filter paper, also suited for chromatography	14, 23
MN 875	technical filter paper	14
MN 918	technical filter paper	14
MN 960	technical filter paper	14
MN 1640 d	ashless, wet-strengthened filter paper	9
MN 1640 de	ashless, wet-strengthened filter paper	9
MN 1640 m	ashless, wet-strengthened filter paper	9
MN 1640 md	ashless, wet-strengthened filter paper	9
MN 1640 w	ashless, wet-strengthened filter paper	9
MN 1640 we	ashless, wet-strengthened filter paper	9
MN 1670	qualitative wet-strengthened filter paper	11
MN 1672	qualitative wet-strengthened filter paper	11
MN 1674	qualitative wet-strengthened filter paper	11
MN 1817	flue gas test	on request
MN 2101	ashless filter flocs	22
MN 2104	cellulose tablets for x-ray fluorescence analysis	16
MN GF-1	glass fibre paper	12
MN GF-2	glass fibre paper	12
MN GF-3	glass fibre paper	12
MN GF-4	glass fibre paper	12
MN GF-5	glass fibre paper	12
MN GF-6	glass fibre paper	12
MN QF-10	quartz fibre paper	13



Grade	Description	Page
CHROMAFIL® CA	cellulose acetate syringe filters	35
CHROMAFIL® GF	glass fibre filtration cartridges MULTI 96 filter plates syringe filters	31 31 36
CHROMAFIL® GF/PET	polyester with glass fibre prefilter syringe filters	33
CHROMAFIL® GF/PVDF	polyvinylidene difluoride with glass fibre prefilter syringe filters	33
CHROMAFIL® GF/RC	regenerated cellulose with glass fibre prefilter syringe filters	33
CHROMAFIL® MV	cellulose mixed esters MULTI 96 filters syringe filters	31 36
CHROMAFIL® PA	polyamide syringe filters	37
CHROMAFIL® PES	polyethersulfone syringe filters	36
CHROMAFIL® PET	polyester filtration cartridges syringe filters	31 34
CHROMAFIL® PTFE	polytetrafluoroethylene filtration cartridges MULTI 96 filters syringe filters	31 31 35
CHROMAFIL® PVDF	polyvinylidene difluoride filtration cartridges syringe filters	31 37
CHROMAFIL® RC	regenerated cellulose filtration cartridges MULTI 96 filters syringe filters	31 31 34
PORAFIL® CA	membrane filters made from cellulose acetate	29
PORAFIL® CM	membrane filtes made from cellulose mixed esters (sterile / not sterile)	28
PORAFIL® MV	membrane filters made from cellulose mixed esters, reinforced with polyester fabric	29
PORAFIL® NC	membrane filters made from nitrocellulose (cellulose nitrate)	29
PORAFIL® PC	membrane filters made from polycarbonate	30
PORAFIL® PE	membrane filters made from polyester	30
PORAFIL® RC	membrane filters made from regenerated cellulose	30
PORAFIL® TE	membrane filters made from polytetrafluoroethylene	30

# MACHEREY-NAGEL

Your competent partner in analytical chemistry

## Tradition and Modernity – 100 years experience

- Worldwide operating German company (founded 1911)
- Subsidiaries in France, Switzerland and USA
- Distributors in over 150 countries
- Longtime tradition in filter papers
- Development, production and sales of special products for water, environmental and food analysis, for biotechnology, chemical and pharmaceutical industry and medical diagnostics



## Quality and Diversity – 5 product ranges with over 25 000 products “Made in Germany”

### Filtration

- Filter papers
- Membrane filters
- Extraction thimbles

### Rapid Tests

- Test papers and test strips
- Urine Test Strips

### Water Analysis

- Colorimetric and titrimetric test kits
- Photometric water analysis
- Microbiology

### Chromatography

- High performance liquid chromatography (HPLC)
- Gas chromatography (GC)
- Thin layer chromatography (TLC)
- Sample preparation (SPE)

### Bioanalysis

- Kits for purification of nucleic acids
- Kits for purification of proteins
- Transfer membranes



## Service

- Technical support by our Customer Service Center
- Product-specific quality certificates and Material Safety Data Sheets
- Customized special products
- Easy ordering and short delivery times
- Large number of catalogs, flyer and product information – of course free of charge

## Contact

Technical support and customer service  
for Water Analysis, Filtration,  
Rapid Tests, Medi-Test:

+49 24 21 969-138  
+49 24 21 969-161  
+49 24 21 969-174  
+49 24 21 969-187  
csc@mn-net.com

Product management Filtration and  
Rapid Tests:  
Please visit our website:

+49 24 21 969-166  
[www.mn-net.com](http://www.mn-net.com)

Your local distributor:

[www.mn-net.com](http://www.mn-net.com)

# MACHEREY-NAGEL



MACHEREY-NAGEL GmbH & Co. KG · Neumann-Neander-Str. 6-8 · 52355 Düren · Germany

Germany

and international:

Tel.: +49 24 21 969-0  
Fax: +49 24 21 969-199  
E-mail: [info@mn-net.com](mailto:info@mn-net.com)

Switzerland:

MACHEREY-NAGEL AG

Tel.: +41 62 388 55 00  
Fax: +41 62 388 55 05  
E-mail: [sales-ch@mn-net.com](mailto:sales-ch@mn-net.com)

France:

MACHEREY-NAGEL EURL

Tel.: +33 388 68 22 68  
Fax: +33 388 51 76 88  
E-mail: [sales-fr@mn-net.com](mailto:sales-fr@mn-net.com)

USA:

MACHEREY-NAGEL Inc.

Tel.: +1 484 821 0984  
Fax: +1 484 821 1272  
E-mail: [sales-us@mn-net.com](mailto:sales-us@mn-net.com)

